36" TRANSITIONAL FRAMED INDUCTION COOKTOP

NOLF

CI365TF/S

FEATURES

Distributes heat more evenly with 40 percent faster temperature response than gas or electric

Transfers heat more efficiently because the energy is supplied directly to the cookware

Enjoy cooking with lightning-fast highs and subtle lows

Pair our slim 15" width with other Wolf modules for an integrated design

The Bridge function joins two induction zones into one large area, enabling use of an induction-capable griddle, open roaster, or fish poacher

Promote safer and easier cooking with cookware sensing guards

Cleanup is a snap with the black ceramic glass surface


Enjoy the illuminated touch controls and convenient lock feature

ACCESSORIES

Cooktop/Module Filler Strip

Cooktop/Module Filler Strip for Downdrafts

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.

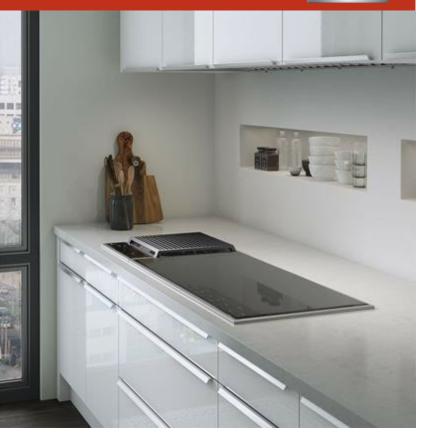


COOKTOP SPECIFICATIONS

- · Brushed stainless trim
- · Black ceramic glass surface
- · True simmer and melt settings
- · Boost Mode for high heat
- 2 2,100 W element
- 2 2,100 W Element with 3,700 W Boost
- 1 2,600 W element with 3,700 W boost

PRODUCT SPECIFICATIONS


Model	CI365TF/S
Dimensions	36"W x 2"H x 21"D
Weight	61 lbs
Electrical Supply	3-wire, 240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Conduit Length	4 Feet

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS



STANDARD INSTALLATION

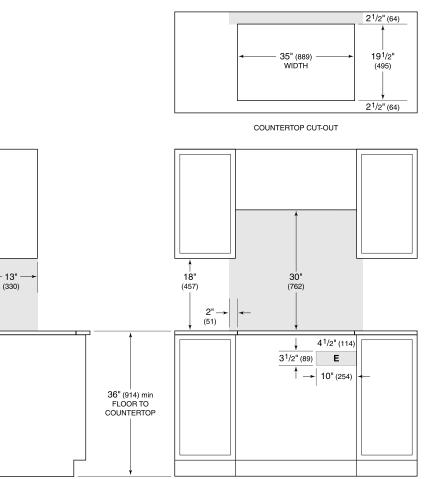

SIDE VIEW

FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Electrical supply location only applies to installations with built-in oven.