

DA 1280

30-inch built-under ventilation hood

with energy-efficient LED lighting and sliding switch for simple operation.



- Puristic design – space-saving solution 30 (760) in (mm) wide
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating


EAN: 4002515774403 / Material number: 10451490 / Old Material Number: 28128055USA

Design	
Built-under ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
OdorFree charcoal filter (order separately)	DKF 18-900
User convenience	
Recessed knob controls	•
Power levels (number excl. Intensive)	3
Slide switch	•
Booster levels	1
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	3
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	275 lx
Color temperature in K	3000 Kelvin
Blower	
Single-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	220
Air throughput	Values upon request
Technical data	
Canopy width in in.(mm)	30 (760)
Canopy height in in.(mm)	5 (125)
Canopy depth in in.(mm)	19 3/4 (500)
Net weight in lbs. (kg)	29 (12.9)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.28
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Installation template	•
Standard accessories	
Recirculation deflector	•
Non-return flap	•

DA 1280

30-inch built-under ventilation hood

with energy-efficient LED lighting and sliding switch for simple operation.

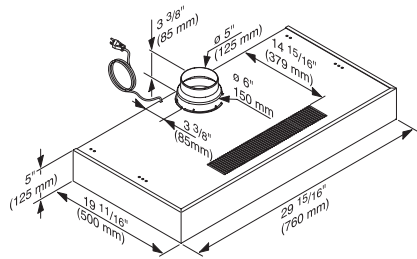

DA 1180, Stainless steel (installation drawing)