

DAS 2620  
Built-in ventilation hood  
with EasySwitch controls for convenient operation




- Classic design – stainless-steel panel, 24 in (60 cm) wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495505 / Material number: 11878490 / Old Material Number: 28S2620SUSA


<b>Design</b>	
Built-in ventilation hood	•
<b>Construction type and design</b>	
Color	Stainless steel
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
<b>User convenience</b>	
Electronic controls	•
Booster levels	1
CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless-steel grease filters	1
<b>Lighting</b>	
LED	•
Number x W	1 x 3,0 W
Light intensity in lx	330 lx
Color temperature in K	3500 Kelvin
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Exhaust air</b>	
Maximum air throughput in cfm according to HVI	427
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	23 1/2 (596)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	31 (14.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
<b>Installation note</b>	
Vent connection at top	•
<b>Standard accessories</b>	
Non-return flap	•

## DAS 2620 Built-in ventilation hood with EasySwitch controls for convenient operation

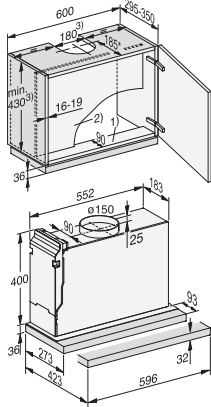

DAS2620, DAS2620-1, DAS2622 Living, DAS2620 EXTA, DAS4620, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable. , 3) Extraction, recirculation with conversion kit DUU 150. , \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

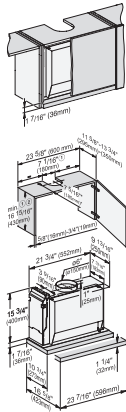

DAS2620, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts. , 2) Exhaust air, recirculation with DUU 150 conversion kit. , \*In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.