# **30" E SERIES TRANSITIONAL BUILT-IN DOUBLE OVEN**

### DO3050TE/S/T

### **FEATURES**

Wolf's dual convection system—featured in the upper oven cavity provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Enjoy the extra space and versatility of the conventional lower oven

Take the guesswork out of cooking with 10 chef-created cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm

Gourmet Mode, featured in the upper oven, offers nearly 50 presets to automatically cook a delicious set of impressive dishes

The large full-color touchscreen and stainless touch controls are intuitive and easy-to-read

The temperature probe alerts you when your dish has reached the desired temperature

The oven offers self-clean, delayed start, timed cook, and Sabbath features

Control your oven from wherever you are using our convenient Owner's App—remotely preheat, adjust temperatures, select modes, and more

Coordinates with other Sub-Zero, Wolf, and Cove appliances to create a cohesive look in your kitchen

Get the most out of your oven with tips and recipes from the Mastering the E Series Oven guide

## ACCESSORIES

30" Broiler Pan

30" Premier Baking Sheet

30" Standard Oven Rack

Bake Stone Kit

Dehydration Kit

Full-Extension Ball-Bearing Rack

Standard Oven Rack

Temperature Probe

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.




NOLF

#### Specifications are subject to change without notice. This information was generated on February 11, 2025. Verify specifications prior to finalizing your cabinetry/enclosures.


## **PRODUCT SPECIFICATIONS**

Model	DO3050TE/S/T
Dimensions	29 7/8"W x 50 7/8"H x 23"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 18 1/2"D
Oven 2 Interior Dimensions	25 1/4"W x 17 1/2"H x 18 1/2"D
Overall Capacity	4.7 cu. ft.
Usable Capacity	3.1 cu. ft.
Door Clearance	21 3/8"
Weight	446 lbs
Electrical Supply	grounded, 240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Conduit Length	5 Feet

# DIMENSIONS

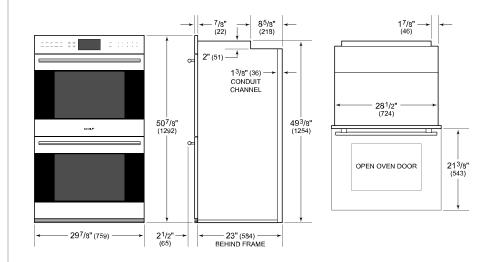


# **FLUSH INSTALLATION**

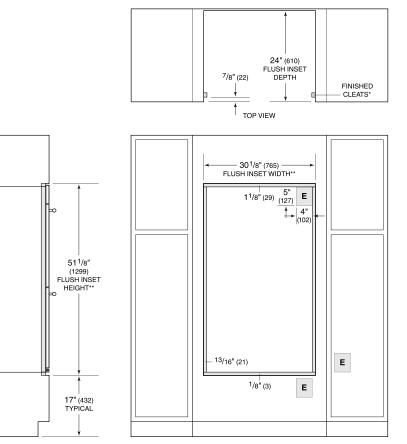

SIDE VIEW



\*Shaded areas will be visible and should be finished to match cabinetry. \*\*Dimension provides minimum reveals.



**ELECTRICAL** 

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

