



**15" CLEAR ICE MAKERS**  
Indoor/Outdoor



JOB	
AREA	
ITEM NO.	
MODEL NO.	



**H50IMS-R**  
Stainless Steel Door Model  
Hinged right



**H50IMS-ADL**  
Stainless Steel Door Model  
Hinged left

**SIGNATURE SERIES MODELS**

MODELS	DESCRIPTION
<b>H50IMS-L</b>	Solid stainless steel door, hinged left
<b>H50IMS-R</b>	Solid stainless steel door, hinged right
<b>H50IMW*</b>	Panel ready door, hinged left or right

**ADA-HEIGHT COMPLIANT MODELS**

MODELS	DESCRIPTION
<b>H50IMS-ADL</b>	Solid stainless steel door, hinged left
<b>H50IMS-ADR</b>	Solid stainless steel door, hinged right
<b>H50IMW-AD*</b>	Panel ready door, hinged left or right


\* This unit comes ready to accept customer-provided overlay panel and handle

**KEY PRODUCT FEATURES AND BENEFITS**

- Produces clear, top hat shaped ice, that is clear of imperfections and prevents ice from clumping like traditional ice makers
- Produces up to 51 lbs. of ice per day with a storage capacity of 22 lbs. ensures you always have fresh ice for gathering of any size
- Easily disassembled all stainless steel ice making surface allows easy cleaning and ensures fresh ice for the life of the machine
- ADA-height compliant models available for accessible and aging in place designs

**Quick Features:**

- Available with stainless steel or panel ready doors to match your design style – Panel read doors come ready to accept customer-supplied door overlay and handle
- UL-Approved for outdoor use
- Power switch accessible without panel removal
- Ice continually melts and drains to a gravity drain or can be routed to a remote drain with optional drain pump (63802A)



**Cube Dimensions**




**15" CLEAR ICE MAKERS**  
Indoor/Outdoor




MODEL NUMBERS		H50IMS Signature Series	H50IMS-AD ADA-Height Compliant Series
OVERALL DIMENSIONS	Width - in. (mm)	14-7/8" (378mm)	14-7/8" (378mm)
	Depth - in. (mm)	22-9/16" (573 mm)	22-9/16" (573 mm)
	Height - in. (mm)	33-1/2" (851 mm)	31-1/2" (800 mm)
OPENING DIMENSIONS	Width - in. (mm)	15" (381 mm)	15" (381 mm)
	Depth - in. (mm)	24-7/8" (632 mm)	24-7/8" (632 mm)
	Height - in. (mm)	34-1/2"	32-1/4" (819 mm)
SHIPPING WEIGHT Lbs.		118 lbs (52.16 kb)	118 lbs (52.16 kb)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115V/60 Hz/1 Ph	115V/60 Hz/1 Ph
	Running Load Amps	3.4 amps	3.4 amps
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord length	6.5 ft	6.5 ft
REFRIGERATION SPECIFICATIONS	Refrigerant	R134a (4.2 oz.)	R134a (4.2 oz.)
	Plumbing	1/2" FTP water Inlet, 1/2" FTP Drain	1/2" FTP water Inlet, 1/2" FTP Drain
OPERATING LIMITS	Ambient Temp Range	45-100F	45-100F
	Water Temp Range	45-90F	45-90F
	Water Pressure	7-113 psig	7-113 psig
	Voltage Range	104-127V	104-127V






**15" CLEAR ICE MAKERS**  
Indoor/Outdoor

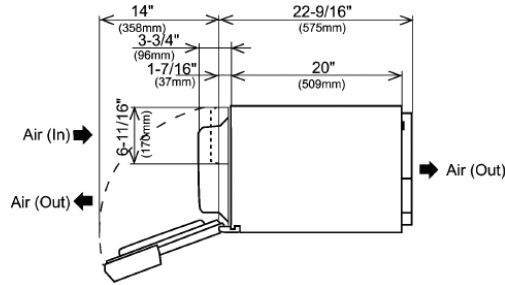

**Top View –  
Signature and ADA-Height Compliant Series  
Cubelet Ice Makers**

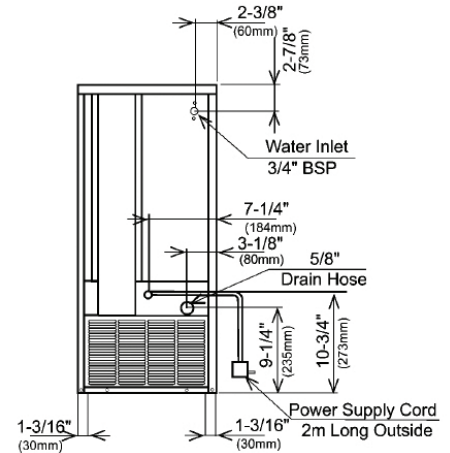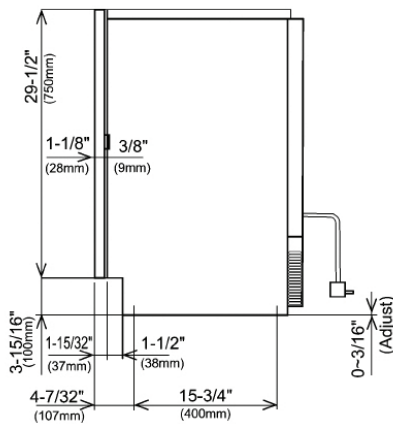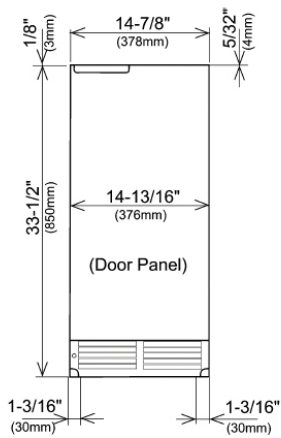

**Signature Series Front, Side and Back View**

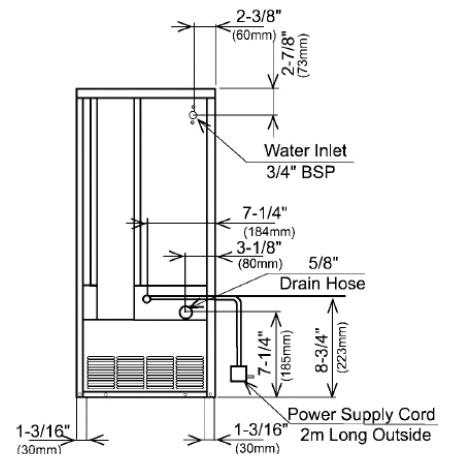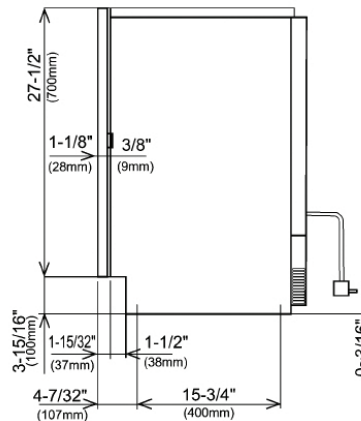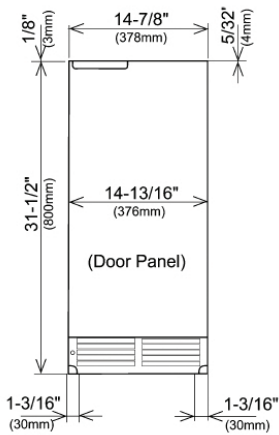

**ADA-Height Compliant Series Front, Side and Back View**

**California Prop 65 Notice:**



**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Form No. Z2546  
Rev 08.07.23