

H 7240 BM AM

24" compact speed oven

in a perfectly combinable design with automatic programs and combi modes.



- Clear-text display with sensor controls – DirectSensor S
- Easy cleaning – cavity with linen-weave pattern & PerfectClean
- Faster and more consistent results – Quick & Gentle
- Network-enabled WiFi appliance – Miele@home
- What you want is just a button away – Quick MW and Popcorn button

EAN: 4002516976875 / Material number: 12842740 /
Old Material Number: 22724026USA

General information	
Model number	H 7240 BM AM
Manufacturer material number	12842740
EAN number	4002516976875
Marketing class	Gold
Construction type and design	
VitroLine	•
Appliance type and design	
Speed oven	•
3 in 1	Oven, Microwave, Speed oven
Appliance color	Obsidian Black
Convenience features	
Precise oven temperature regulation in °F (°C)	85-475 (30-250)
Quick & Gentle	•
Rapid PreHeat	•
Operating modes	
Defrost	•
Convection	•
Auto roast	•
Microwave	•
Micro Broil	•
Combi Broil	•
Combi Bake	•
Combi Auto Roast	•
Convection Broil	•
Maxi Broil	•
Gentle Bake	•
Automatic programs	•
User convenience	
Networking with Miele@home	•
Control panel	DirectSensor S
SoftOpen	•
SoftClose	•
MultiLingua	•
Popcorn function	•
Time of day display	•
Time synchronization	•
Minute minder	•
Programming start of cooking duration	•
Programming end of cooking duration	•
Programmable cooking time	•
Actual temperature display	•
Audible signal when desired temperature is reached	•
Default temperature	•
Recommended microwave power	•
Minute Plus button	•
Individual settings	•

24" compact speed oven

FAN: 4002516976875 / Material number: 12842740 /




Old Material Number: 22724026USA

Smart Extras	
Recipes	•
Alexa voice control	•
Google voice control	•
Push notifications	•
RemoteUpdate	•
Smart Home Integration	•
Cleaning convenience	
Stainless-steel cavity with linen surface structure	•
Foldable broil heater element	•
CleanGlass door	•
Safety	
Appliance cooling system and cool touch front	•
Safety cut-out	•
System lock	•
Technical data	
Cavity volume in cu.ft (l)	1.52 (43)
No. of rack levels	3
Mains plug	NEMA plug: 14–30
Oven interior lighting	1 LED spot
Electronically controlled microwave power	•
Microwave power levels	1 – 7
Niche width min. in inches (mm)	22 (560)
Niche width max. in inches (mm)	22 3/8 (568)
Niche height min. in inches (mm)	17 3/4 (450)
Niche height max. in inches (mm)	17 3/4 (452)
Niche depth in in. (mm)	21 5/8 (550)
Weight in lbs. (kg)	93.7 (42.5)
Total connected load in kW	3.40
Power Rating in V	120
Voltage in V	240/208
Frequency in Hz	60
Fuse rating in A	30
Number of phases	1
Length of power cord in m	1.80
Standard accessories	
Wire rack with PerfectClean	1
Glass tray	1
Available display languages	
Available display languages via MultiLingua	☐☐☐☐☐☐☐☐, ☐☐, ☐☐☐☐☐, deutsch, dansk, english, suomi, français, ελληνικά, italiano, ☐☐☐☐, ☐☐☐☐, hrvatski, bahasa malaysia, nederland, norsk, polski, português, română, русский, svenska, srpski, slovenčina, slovensčina, español, čeština, türkçe, українська, magyar

H 7240 BM AM


24" compact speed oven

in a perfectly combinable design with automatic programs and combi modes.

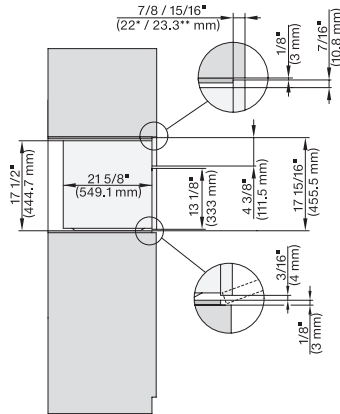


side view 30 inch Flush inset 450S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

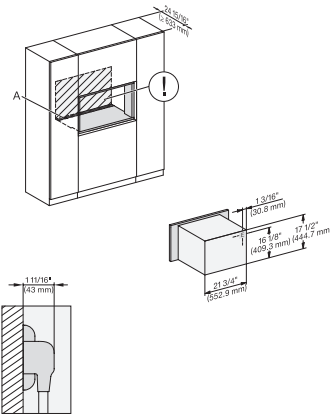


installation 30 inch Flush inset 450S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

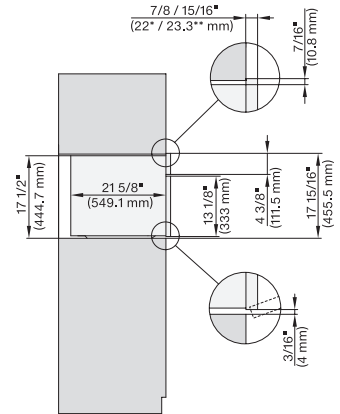


side view 30 inch Proud 450S, installation drawing, NA

7/8" – 22* mm – Glas, 15/16" – 23.3** mm – Edelstahl

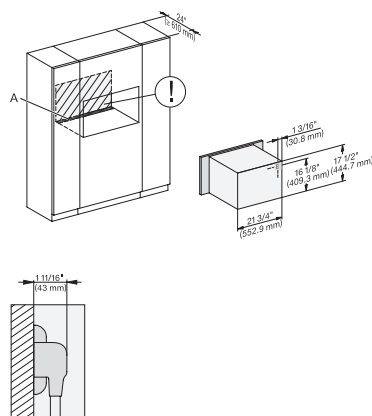

installation 30 inch Proud 450S, installation drawing, NA

A – Cut-out (1 9/16" x 19 11/16" / 40 mm x 500 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

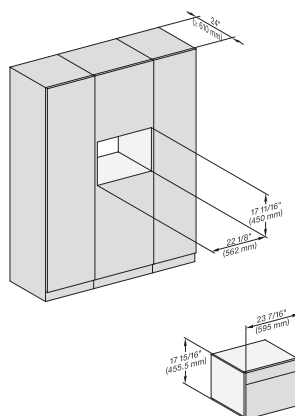

installation Proud 450S, installation drawing, NA