

LIEBHERR

Contents

1 1.1	The appliance at a glance Delivered contents	3 3
1.2	Overview of appliances and equipment	4
1.3 1.4	SmartDevice Range of appliance use	4
1.5 2	Conformity General safety instructions	5 5
- 3	Functionality of the Touch & Swipe display.	8
3.1 3.2 3.3	Navigation and symbol explanation Menus Sleep mode	8 8 9
4	Start-up	9
4.1	Switching on appliance (first use)	9
4.2 4.3	Putting InfinitySpring into operation Starting the IceMaker for the first time	10 10
5 5.1	Storage Information regarding storage	10 10
5.1 5.2	Fridge compartment	10
5.3	BioFresh	10
5.4 5.5	Freezer compartment Storage times	11 12
6	Energy saving	14
7	Use	14
7.1	Controls and displays	
7.1.1 7.1.2	Status display Display symbols	
7.2	Appliance functions	
7.2.1	Notes on the appliance functions	
\bigcirc	Turn off appliance	14
7.2.3	Switching temperature zones off and on WiFi	
5 °c	Temperature	16
℃∕∕℉	Temperature unit	17
B5	BioFresh B-Value	17
D1	D-Value	17
*	SuperCool	17
VarioTemp	VarioTemp	17
**	SuperFrost	18
$^{+}$	Supervisit	
*^	Start defrost cycle	

	HolidayMode	20
	SabbathMode	20
	EnergySaver	. 21
	IceMaker / MaxIce	21
5	IceMaker water inflow	22
<u>(</u>	TubeClean	23
$\langle O \rangle$	CleaningMode	.23
	Display Brightness	24
	Door alarm	24
×ſĿ	Input lock	25
Ì	Language	25
Service No: Nodel Index: Servall:	Appliance information	.25
of Sen XXXXXXXX P8 SW: BXXXXXXXXXXX Software	Software	.25
٢ĭ٢	Reminder	26
\bigcirc	Demo mode	.26
\bigcirc	Resetting to factory settings	.27
7.3	Error messages	
7.3.1 7.3.2	Warnings Message	
		28
8 8.1	Equipment Door racks	20
8.2	Shelves	29
8.3	Split shelf	29
8.4	InfinitySpring	30
8.5	Space for baking tray	30
8.6 8.7	Variable bottle shelf Drawers	30 31
8.8	Fruit & Vegetable-Safe cover	32
8.9	Humidity control	33
8.10	Glass shelves	33
8.11	IceMaker	34
8.12	VarioSpace	34
8.13	Butter dish	35
8.14 8.15	Egg rack	35 35
8.15 8.16	Bottle rack FlexSystem	35 35
8.17	Freezer packs	36
8.18	Ice cube tray with lid	36
8.19	Flexible ice compartment divider	37

The	app	liance	at a	glance
				J

9 9.1 9.2 9.3 9.4 9.5 9.6	Maintenance.FreshAir carbon filter.Water tank.Water filter.Disassembling / assembling pull-outsystems.Defrosting the appliance.Cleaning the appliance.	37 38 38 38 39 40 40
10 10.1 10.2 10.3 10.4 10.5	Customer support Technical specifications Operating noises Technical faults Customer Service Rating plate	41 42 42 44 44
11	Decommissioning	44
12 12.1 12.2	Disposal Preparing the appliance for disposal Disposing of the appliance in an environmentally friendly manner	45 45 45

Congratulations on the purchase of your new appliance. With this purchase, you have chosen all the advantages of the latest refrigeration technology, guaranteeing you a high-quality appliance with a long life span and high operating safety.

The equipment of your appliance gives you the highest level of day-to-day ease of operation.

Together we are making an active contribution to the conservation of our environment by purchasing this appliance which is manufactured in an environmentally friendly process with the use of recyclable materials.

We hope you enjoy your new appliance.

The manufacturer is constantly working to improve all types and models. Therefore, please be aware that we reserve the right to make changes to the shape, equipment and technology.

Symbol	Explanation		
	Read instructions Please read the information in these instructions carefully to understand all of the benefits of your new appliance.		
	Check appliance Check all parts for transport damage. If you have any complaints, please contact your agent or customer service.		
*	Differences These instructions apply to a range of models, so there may be differences. Sections that apply to certain models only are indicated by an asterisk (*).		
\land	Instructions and results Instructions are marked with a ▶. Results are marked with a ▷.		

Symbol	Explanation	
	Videos Videos about the appliances are available on the YouTube channel of Liebherr-Hausg- eräte.	

These operating instructions apply to:

ICB5160	Μ

Note

If your appliance has an N in its appliance designation, it is a NoFrost appliance.

1 The appliance at a glance

1.1 Delivered contents

Check all parts for transport damage. If you have any complaints, please contact the retailer or customer service. (see 10.4 Customer Service)

Delivery contains the following parts:

- Integrated appliance
- Equipment (depending on your model)
- Installation parts (depending on your model)
- User Guide
- Installation Guide
- Warranty documents

1.2 Overview of appliances and equipment

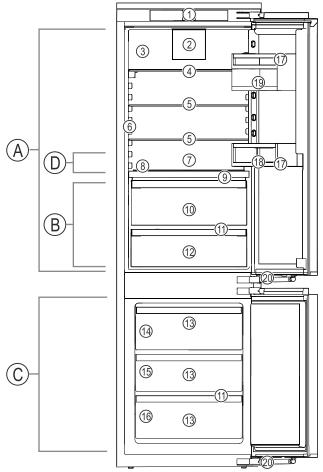


Fig. 1 Example illustration

Temperature range

(A) Fridge compartment (B) BioFresh

(C) Freezer compartment (D) Coldest zone

Equipment (11) Drain hole

- (1) Controls (2) Fan with FreshAir
- activated charcoal filter
- (3) Dry rear wall (4) Separable storage shelf
- (5) Storage shelf
- (6) InfinitySpring
- (7) Space for baking tray
- (8) Variable bottle rack
- (9) Cover for Fruit & Vegetable-Safe
- (10) Fruit & Vegetable-Safe

(13) Freezer drawer

(12) Meat & Dairy-Safe

(14) IceMaker

(15) VarioSpace (16) Nameplate (17) Door racks

(18) Bottle holder (19) VarioBoxes

(20)Soft-closing mechanism

Note

The shelves, drawers, and baskets are arranged for optimal energy efficiency in the factory configuration. However, changes to the arrangement within the given insertion options - for example the arrangement of shelves in the fridge compartment have no effect on energy consumption.

1.3 SmartDevice

SmartDevice is the networking solution for your fridgefreezer.

If your appliance is SmartDevice-enabled or compatible, you can guickly and easily connect your appliance to your WiFi. With the SmartDevice app, you can operate your appliance from a mobile device. Additional functions and setting options are available in the SmartDevice app.

SmartDeviceenabled ance:

Your appliance is capable of being appli- a SmartDevice. To be able to connect your device to WiFi, you need to download the SmartDevice app.



More information smartdevice.liebherr.com about SmartDevice:

Downloading the SmartDevice app:



After installing and configuring the SmartDevice app, you can connect your appliance to the WiFi using the SmartDevice app and the WiFi appliance function (see WiFi).

1.4 Range of appliance use

Normal use

This appliance is intended to be used in household and similar applications such as,

- staff kitchen areas in shops, offices and other working environments;
- farm houses and by clients in hotels, motels and other residential type environments:
- bed and breakfast type environments;
- catering and similar non-retail applications.

All other types of uses are not permitted.

Foreseeable misuse

The following uses are specifically prohibited:

- Storage and cooling of medication, blood plasma, laboratory preparations or similar substances and products in accordance with the CMDCAS and FDA 510(k)
- Use outdoors
- Use in moist areas exposed to the rain
- Use in outdoor areas with very high humidity
- Use in areas at risk of explosion

Incorrect appliance use can cause damage to the stored products or cause them to spoil.

Climate ratings

The appliance is set to operate within specific ambient temperature limits according to its climate rating The climate rating for your appliance is printed on the rating plate

Note

► To guarantee trouble-free operation, comply with the indicated ambient temperatures.

Climate rating	for ambient temperatures from
SN	10 °C (50 °F) to 32 °C (90 °F)
Ν	16 °C (61 °F) to 32 °C (90 °F)
ST	16 °C (61 °F) to 38 °C (100 °F)
Т	16 °C (61 °F) to 43 °C (109 °F)
SN-ST	10 °C (50 °F) to 38 °C (100 °F)
SN-T	10 °C (50 °F) to 43 °C (109 °F)

1.5 Conformity

The refrigerant circuit has been tested for leaks. When installed, the appliance complies with the applicable safety regulations and with the corresponding directives.

The BioFresh compartment meets the requirements of a cold storage compartment as set out in EN ISO 8561.

2 General safety instructions

Please keep these operating instructions in a safe place so you can refer back to them at any time.

If you pass the appliance on, please hand these operating instructions to the new owner. Read and follow these instructions. They contain safety information which is important for safe and problem-free installation and

operation. Always read and follow the safety information.

Dangers for the user:

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance. Cleaning and user maintenance must not be performed by children unless they are supervised. Children between the ages of 3 and 8 may load and unload the appliance. Children under the age of 3 must be kept away from the appliance unless they are constantly supervised.
- **IMPORTANT:** The power plug must be easily accessible so that the appliance can be disconnected from the mains quickly in an emergency. It must not be behind the back of the appliance.
- The socket must be easily accessible so that the appliance can be disconnected quickly from the electricity in an emergency. It must not be located in the area behind the appliance.
- Always hold the appliance at the plug when disconnecting it from the household power. Do not pull on the cable.
- Disconnect the power plug or fuse if there is a malfunction.
- Do not damage the power cable. Do not operate the appliance with a faulty power cable. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard. For Plug and Play connections, the change may be carried out by the customer.
- Repairs and work on the appliance may only be carried out by Customer Service or other specifically trained qualified personnel.
- Only install, connect and dispose of the appliance in accordance with the instructions.

- Only operate the appliance after it has been installed.
- The manufacturer is not liable for damage arising from a defective fixed water connection.

Risk of fire:

- The refrigerant contained within the appliance (specifications on the identification plate) is environmentally friendly, but flammable. Leaking refrigerant can ignite.
 - **WARNING**: Do not damage the refrigerant circuit.
 - Do not handle ignition sources inside the appliance.
 - WARNING: Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer (e.g. steam cleaning appliances, heating appliances, ice cream makers).
 - If refrigerant leaks: Remove naked flames or ignition sources located near the area of the leak. Ventilate the room well. Contact Customer Service.
- Do not operate the appliance near explosive gases.
- Do not store or use gasoline or other flammable gases and liquids near the appliance.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance. You can recognize such spray cans by the printed list of contents or by a flame symbol. Any leaking gases can be ignited by electrical components.
- Alcoholic beverages or other containers holding alcohol must always be tightly sealed for storage purposes. Any leaking alcohol can be ignited by electrical components.

Risk of falling or toppling over:

- **WARNING**: To avoid a hazard due to instability of the appliance, it must be fixed in accordance with the instructions.
- Do not stand on the base, drawers, doors etc. or use them as improper supports. This applies in particular to children.

Danger of poisoning:

- Do not consume spoiled food.

- **WARNING**: Connect to potable water supply only.
- Do not use any old or already premounted water supply lines.

Danger of frostbite, feeling of numbness and pain:

- Avoid prolonged skin contact with cold surfaces or chilled/frozen food or take protective measures, e.g. wear gloves.

Risk of injury and damage:

- Hot steam may cause injuries. Do not use any electrical heating or steam cleaning equipment, naked flames or defrosting sprays for defrosting measures.
- **WARNING**: Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- Do not remove ice using sharp objects.
- **WARNING**: Keep clear of obstruction all ventilation openings in the appliance enclosure or in the structure for building-in.
- **WARNING**: Risk of child entrapment. Before you throw away your old refrigerator or freezer:
 - Take off the doors.
 - Leave the shelves in place so that children may not easily climb inside.

Risk of crushing:

- Do not hold onto the hinge when opening and closing the door. Fingers may become trapped.

California Proposition 65

- **WARNING**: This product can expose you to chemicals including Diisononyl Phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl Phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

FCC Warning

- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC information

- This appliance has been tested and found to comply with the limits for a Class B digital

device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference from an installation in residential areas. This appliance generates, uses and can radiate radio-frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this appliance does cause harmful interference to radio or television reception, which can be determined by switching the appliance on and off, the user should try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the appliance and receiver.
- Connect the appliance to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radio Frequency Exposure Statement

- This appliance is found to comply with FCC radio frequency (RF) exposure limits set for an uncontrolled environment. This transmitter must not be set up or operated in conjunction with another antenna or another transmitter.
- This appliance should be installed and operated with a minimum space of 200 mm (7 7/8 in) between the antenna and your body. The user must follow the specific operating instructions to ensure compliance with RF exposure.

IC information

- This appliance has license-exempt transmitters/receivers, which comply with the license-exempt Radio Standards Specification (RSS) of Innovation, Science and Economic Development Canada. Operation is subject to the following two conditions:
 - This appliance may not cause interference.
 - This device must accept any interference, including interference that may cause undesired operation of the device.

IC Radio Frequency Exposure Statement

This appliance meets the IC RSS-102 limits for radiation exposure, which were defined for an uncontrolled environment. This appliance should be installed and operated so that there is a minimum space of 200 mm (7 7/8 in) between the antenna and your body.

Symbols on the device:



The symbol may be located on the compressor. It refers to the oil in the compressor and refers to the following danger: Can be fatal if swallowed or inhaled. This notice only applies for recycling. There is no danger during normal operation.



WARNING: Risk of fire / flammable materials. The symbol is located on the compressor and indicates the danger from flammable materials. Do not remove the label.



This label or a similar one may be located on the rear of the appliance. This label indicates that there are vacuum insulation panels (VIP) or perlite panels in the door and/or housing. This notice only applies for recycling. Do not remove the label.

Observe the warning messages and other detailed information in the other sections:

Â	DANGER	Indicates an immediately hazardous situation, which if not avoided, will result in death or serious injury.
	WARNING	Indicates a hazardous situa- tion, which if not avoided, could result in death or serious injury.
Â	CAUTION	Indicates a hazardous situa- tion, which if not avoided, could result in minor or moderate injury.
	NOTICE	Indicates a hazardous situa- tion, which if not avoided, could result in damage to prop- erty.
	Note	Indicates useful advice and tips.

3 Functionality of the Touch & Swipe display

You operate your appliance using the Touch & Swipe display. You select appliance functions in the Touch & Swipe display (hereafter referred to as display) by tapping them. If you do not perform any action on the display for 10 seconds, the display either jumps back to the higher-level menu or directly to the status display.

3.1 Navigation and symbol explanation

In the illustrations, different symbols are used to navigate the display. The following table describes these symbols.

Symbol	Description
	Briefly touch the display: Activates/deactivates function. Confirms selection. Opens submenu.
(33)	Touch the display for a specified time (e.g. 3 seconds): Activates/deactivates function or value.
5	Swipe left or right: Navigate in the menu.
Back	Briefly touch the Back symbol: Jumps back one menu level.
Back 33	Press and hold the Back symbol for 3 seconds: Jumps back to the status display.
 ➡ ➡ 	Arrow with clock: It takes more than 10 seconds for the following message to appear in the display.
➡ ➡ ➡ 2s 5s 10s	Arrow with a time indication: It takes the specified amount of time until the following message appears in the display.

Symbol	Description
={}	"Open Settings menu" symbol: Navigates to the Settings menu and opens the settings menu. If necessary: Navigate to the desired function in the Settings
	menu. (see 3.2.1 Opening the Settings menu)
	"Open Advanced menu" symbol: Navigates to the Advanced menu and opens the advanced menu. If necessary: Navigate to the desired function in the Advanced menu.
No action for 10 seconds	(see 3.2.2 Opening expanded menu) If you do not perform any action on the display for 10 seconds, the display either jumps back to the higher-level menu or directly to the status display.
Open door and close it again.	If you open the door and immedi- ately close it again, the display jumps directly back to the status display.

3.2 Menus

The appliance functions are distributed over various menus:

Menu	Description
Main menu	When you switch the appliance on, you are automatically in the main menu.
	From here you can navigate to the most important appliance functions, to the Settings menu and to the Advanced menu.
کن Settings	The Settings menu contains addi- tional appliance functions for setting up your appliance.
Settings menu	
Advanced menu	The advanced menu contains special appliance functions for setting up your appliance. Access to the Advanced menu is protected by the numerical code 151 .

3.2.1 Opening the Settings menu

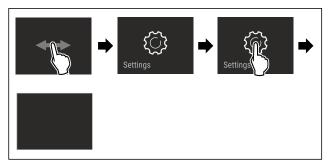



Fig. 2 Example illustration

- Carry out action steps according to the illustration.
- ▷ Settings menu is open.
- ► If necessary: Navigate to the desired function.

3.2.2 Opening expanded menu



Fig. 3

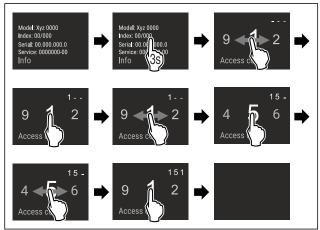

- Fig. 4 Example illustration, access with numerical code 151
 Carry out action steps according to the illustration.
- Expanded menu is open.
- If necessary: Navigate to the desired function.

3.3 Sleep mode

If you do not touch the display for 1 minute, the display switches to sleep mode. In sleep mode, the display brightness is dimmed.

3.3.1 Ending sleep mode

- ► Touch the display briefly with your finger.
- \triangleright Sleep mode is ended.

4 Start-up

4.1 Switching on appliance (first use)

Make sure that the following requirements are fulfilled:

- □ The appliance is properly installed and connected according to the installation instructions.
- □ All adhesive strips, adhesive and protective films and transport locks are removed from inside and on the appliance.
- $\hfill \Box$ All marketing leaflets are removed from the drawers.
- You are familiar with the functionality of the Touch & Swipe display. (see 3 Functionality of the Touch & Swipe display)

Switch on the appliance using the Touch & Swipe display.

- ▶ If the display is in sleep mode: Briefly touch the display.
- Carry out action steps according to the illustration.

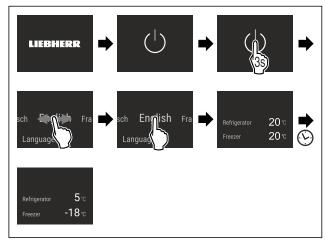


Fig. 5 Example illustration

- \triangleright The status display appears.
- \triangleright The appliance cools to the temperature set at the factory.
- The appliance starts in demo mode (status display with DEMO appears): If the appliance starts in demo mode, you can deactivate demo mode within the next 5 minutes. (see Demo mode)

More information:

- Start the InfinitySpring for the first time. (see 4.2 Putting InfinitySpring into operation)
- Start the IceMaker for the first time. (see 4.3 Starting the IceMaker for the first time)
- Start the SmartDevice for the first time. (see 1.3 SmartDevice) and (see WiFi)

Note

The manufacturer recommends:

- Stock with food: Wait for around 6 hours until the set temperature is reached.
- Store frozen foods at -18 °C (-0 °F) or colder.
- Observe the notes on storing food. (see 5.1 Information regarding storage)

Note

Accessories can be purchased from the Liebherr Service Center. The address for your respective country can be found on the back of the instructions.

4.2 Putting InfinitySpring into opera-tion

If your appliance is equipped with an InfinitySpring, **before the first use** you must bleed the water system for the InfinitySpring and clean the InfinitySpring.

Make sure that the following requirements are fulfilled:

- □ The water supply is connected. See the Installation Guide or installation instructions.
- The water tank is fitted. See the Installation Guide or installation instructions.
- The water filter is fitted. See the Installation Guide or installation instructions.
- □ Appliance is fully installed and connected.

4.2.1 Vent the water system

- ▶ Open the appliance door.
- Push a glass against the lower part of the Infinity-Spring dispenser.
- \triangleright The upper part moves out and air escapes or water flows into the glass.
- Continue until the water flows evenly into the glass.
- \triangleright The water system is now bled.

4.2.2 Cleaning the InfinitySpring

(see 9.6.4 Cleaning the InfinitySpring)

4.3 Starting the IceMaker for the first time

If your appliance is equipped with IceMaker, you must clean the IceMaker **before using it for the first time**.

Make sure that the following requirements are fulfilled:

- □ The water supply has been connected. See Installation Guide or mounting instructions.
- The appliance is properly installed and connected.
- Clean the IceMaker. (see 9.6.5 Cleaning the IceMaker)

5 Storage

5.1 Information regarding storage

Danger of fire

Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

Note

Insufficient ventilation results in an increase in energy consumption and reduction of the refrigerating performance

Always keep the air slots unobstructed.

Observe the following specifications for storage:

- Keep the air vents on the inside of the rear wall free.
- Keep the air vents on the fan free.*
- In the freezer compartment: Package food properly.
- Package or cover foods that readily take on or give off odors or taste in closed containers.
- Package raw meat or fish in clean, closed containers. This will prevent meat or fish from touching or dripping onto other food.
- Keep liquids in closed containers.
- Leave space between goods to ensure good air circulation.
- Store food according to the instructions on the packaging.
- Always observe the best-before date indicated on the packaging.

Note

Failure to follow these guidelines can lead to foodstuffs spoiling.

5.2 Fridge compartment

The air circulation in the appliance creates different temperature zones. You will find the different temperature zones in the appliance and equipment overview. (see 1.2 Overview of appliances and equipment)

5.2.1 Arranging your food properly

- Upper area and door: Store butter, cheese, canned food and tubes.
- Coldest temperature zone: Store perishable foods such as pre-cooked meals.

5.3 BioFresh

BioFresh will extend the storage time for some fresh foods compared to traditional refrigeration.

Taste, freshness and nutritional value (vitamin groups B and C) are largely retained. Less spoilage and shriveling of fruit and vegetables. The food keeps fresher and retains its natural goodness.

Note

The temperature can drop to 0 °C (32 °F) which means foods could easily freeze.

Store cold-sensitive produce such as cucumbers, eggplants, zucchinis and tropical fruit in the fridge compartment.

5.3.1 Fruit & Vegetable safe 🖒 🥖 🎯

This safe creates a storage climate of close to 0 °C (32 °F). The tight lid ensures constant levels of humidity. This storage climate is suitable for storing unpackaged food with high intrinsic moisture (for example, lettuce, vegetables, fruit).

The humidity in the compartment depends on the moisture content of the chilled goods placed in it, and also depends on how often the compartment is opened. You can regulate the humidity level. (see 8.9 Humidity control)

Arranging your food properly

- Store unpackaged fruit and vegetables. If the humidity is too high:
- Regulate the humidity. (see 8.9 Humidity control)

5.3.2 Meat & Dairy safe 🖉 🥯 🗇

This safe creates a storage climate of close to 0 °C (32 °F). This storage climate is suitable for more sensitive foods (e.g. dairy products, meat, fish, sausage).

Arranging your food properly

▶ Store dry or packaged food.

5.4 Freezer compartment

Here, a dry, frosty storage climate is created at -18 °C (-0 °F). The frosty storage climate is suitable for storing frozen food for several months, for making ice cubes or freezing fresh food.

5.4.1 Freezing food

Freezing quantity

The maximum amount of fresh food that you can freeze within 24 hours is specified on the type plate (see 10.5 Rating plate) under "Freezing capacity ... kg/ 24h."

To ensure that food quickly freezes through, adhere to the following quantities per package:

- Fruit and vegetables up to 1 kg (2.20 lb)
- Meat up to 2.5 kg (5.51 lb)

Freezing food using SuperFrost

Depending on the amount of food to be frozen, you can activate SuperFrost before freezing to reach lower freezing temperatures. (see SuperFrost)

Activate SuperFrost if the amount of food you have to freeze is more than approx. 2 kg (4.41 lb).

The time at which you activate SuperFrost depends on the amount of food you have to freeze:

Freezing quan- tity	Time at which you should activate SuperFrost
	Activate SuperFrost about 6 hours before freezing.
freeze	You can place the food in the freezer as soon as the appliance automati- cally deactivates SuperFrost.
Maximum amount of food	Activate SuperFrost about 24 hours before freezing.
to freeze	You can place the food in the freezer as soon as the appliance automati- cally deactivates SuperFrost.

Arranging your food properly



Risk of injury from broken glass!

Bottles and cans with beverages can burst during freezing. This applies in particular to carbonated beverages.

Only freeze bottles and cans with beverages if you have activated the BottleTimer function in the SmartDevice app.

Freezing quantity	Arranging your food properly		
Small amount of food to freeze	Distribute packaged groceries throughout all drawers.		
	If possible, place groceries at the back of the drawer near the rear wall.		
Maximum amount of food	Distribute packaged groceries throughout all drawers.		
to freeze	If possible, place groceries at the back of the drawer near the rear wall.		

5.4.2 Defrosting food



Danger of food poisoning!

- Do not re-freeze defrosted food.
- ► Use defrosted foodstuff as quickly as possible.

You can defrost food in several ways:

- In the fridge compartment
- In the microwave

Storage

- In the oven/fan-assisted oven
- At room temperature
- ► Take out only as much food as necessary.

5.5 Storage times

The storage times given are guidelines Food with a "use by" date must still be consumed by the date indicated on the package

5.5.1 Fridge

The best-before date stated on the packaging applies.

5.5.2 BioFresh

Guideline storage times for the Meat & Dairy-Safe				
Butter	at 1 (34 °F)	°C	up to 90 days	
Hard cheese	at 1 (34 °F)	°C	up to 110 days	
Milk	at 1 (34 °F)	°C	up to 12 days	
Sausage, cold cuts	at 1 (34 °F)	°C	up to 8 days	
Poultry	at 1 (34 °F)	°C	up to 6 days	
Pork	at 1 (34 °F)	°C	up to 6 days	
Beef	at 1 (34 °F)	°C	up to 6 days	
Game	at 1 (34 °F)	°C	up to 6 days	

Note

Note that higher-protein foods spoil more quickly So, shellfish and crustaceans perish faster than fish, and fish perishes faster than meat.

Guideline	storage	times	for	the	Fruit	&	Vegetable-
Safe							

Vegetables, lettuce

Artichokes	at 1 ° (34 °F)	°C	up to 14 days
------------	----------------------	----	---------------

Celery	at		up to 28 days
	1 (34 °F)	°C	
Cauliflower	at 1 (34 °F)	°C	up to 21 days
Broccoli	at 1 (34 °F)	°C	up to 13 days
Endives	at 1 (34 °F)	°C	up to 27 days
Mâche	at 1 (34 °F)	°C	up to 19 days
Peas	at 1 (34 °F)	°C	up to 14 days
Kale	at 1 (34 °F)	°C	up to 14 days
Carrots	at 1 (34 °F)	°C	up to 80 days
Garlic	at 1 (34 °F)	°C	up to 160 days
Cabbage turnip	at 1 (34 °F)	°C	up to 14 days
Iceberg lettuce	at 1 (34 °F)	°C	up to 13 days
Herbs	at 1 (34 °F)	°C	up to 13 days
Leeks	at 1 (34 °F)	°C	up to 29 days
Mushrooms	at 1 (34 °F)	°C	up to 7 days
Radishes	at 1 (34 °F)	°C	up to 10 days
Brussels sprouts	at 1 (34 °F)	°C	up to 20 days

Guideline storage tir Safe	nes for t	he I	Fruit & Vegetable-
Asparagus	at 1 (34 °F)	°C	up to 18 days
Spinach	at 1 (34 °F)	°C	up to 13 days
Savoy cabbage	at 1 (34 °F)	°C	up to 20 days
Fruit			
Apricots	at 1 (34 °F)	°C	up to 13 days
Apples	at 1 (34 °F)	°C	up to 80 days
Pears	at 1 (34 °F)	°C	up to 55 days
Blackberries	at 1 (34 °F)	°C	up to 3 days
Dates	at 1 (34 °F)	°C	up to 180 days
Strawberries	at 1 (34 °F)	°C	up to 7 days
Figs	at 1 (34 °F)	°C	up to 7 days
Blueberries	at 1 (34 °F)	°C	up to 9 days
Raspberries	at 1 (34 °F)	°C	up to 3 days
Red currants	at 1 (34 °F)	°C	up to 7 days
Cherries, sweet	at 1 (34 °F)	°C	up to 14 days
Kiwi	at 1 (34 °F)	°C	up to 80 days
Peaches	at 1 (34 °F)	°C	up to 13 days

Guideline storage times for the Fruit & Vegetable-Safe					
Plums	at 1 (34 °F)	°C	up to 20 days		
Cranberries	at 1 (34 °F)	°C	up to 60 days		
Rhubarb	at 1 (34 °F)	°C	up to 13 days		
Gooseberries	at 1 (34 °F)	°C	up to 13 days		
Grapes	at 1 (34 °F)	°C	up to 29 days		

5.5.3 Freezer

Guidelines for storage periods for various foods				
Ice cream	at -18 (-0 °F)	°C	2 to 6 months	
Sausage, ham	at -18 (-0 °F)	°C	2 to 3 months	
Bread, bakery prod- ucts	at -18 (-0 °F)	°C	2 to 6 months	
Game, pork	at -18 (-0 °F)	°C	6 to 9 months	
Fish, fatty	at -18 (-0 °F)	°C	2 to 6 months	
Fish, lean	at -18 (-0 °F)	°C	6 to 8 months	
Cheese	at -18 (-0 °F)	°C	2 to 6 months	
Poultry, beef	at -18 (-0 °F)	°C	6 to 12 months	
Vegetables, fruit	at -18 (-0 °F)	°C	6 to 12 months	

6 Energy saving

- Always ensure good ventilation. Keep clear of obstruction all ventilation openings in the appliance enclosure or in the structure for building-in.
- Never block air slits in the fan.
- Do not install the appliance in direct sunlight or next to a stove, heater or similar heat source.
- Energy consumption depends on installation conditions such as the ambient temperature (see 1.4 Range of appliance use). A warmer ambient temperature can increase the energy consumption.
- Avoid opening the appliance door for any longer then necessary
- The lower the temperature is set the higher the energy consumption.
- Sort your food items: home.liebherr.com/food.
- All food stored in the appliance should be well wrapped and covered. This prevents frost buildup.
- Only take food out for as long as necessary so that it does not get too warm.
- Insertion of warm foods: first let the food cool down to room temperature.
- Defrost frozen food in the fridge
- For longer periods of absence, use HolidayMode (see HolidayMode).

7 Use

7.1 Controls and displays

7.1.1 Status display




Fig. 6

- (1) Fridge compartment temperature display
 - (3) Freezer compartment y temperature display
- (2) Temperature display BioFresh

The Status display shows the set temperatures and is the home display. From there, you can navigate to the options and settings.

7.1.2 Display symbols

The display symbols provide information about the current appliance status.

Symbol

Appliance status

Standby



The appliance or temperature zone is turned off.

Symbol

Appliance status



Flashing number

Appliance is working. Temperature flashes until the set temperature is reached.



Flashing symbol

Appliance is working. Setting is made.

7.2 Appliance functions

7.2.1 Notes on the appliance functions

The appliance functions are set at the factory so that your appliance is fully functional.

Before you alter, activate or deactivate the appliance functions, make sure that the following requirements are met:

- You have read and understood the descriptions of how the display works.
- □ You have familiarized yourself with the operating and display elements of your appliance.

U Turn off appliance

This setting turns off the whole appliance.

Switch off whole appliance



Fig. 7

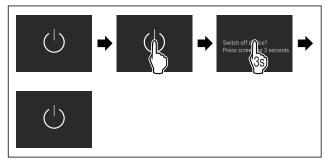


Fig. 8

Turning off the IceMaker .

 \triangleright Off: Display turns black.

7.2.3 Switching temperature zones off and on

You can switch temperature zones of the appliance off independently.

Application:

- Cleaning
- Defrosting

Switching the fridge compartment off

Make sure that the following requirements are fulfilled:

InfinitySpring water tank is empty.


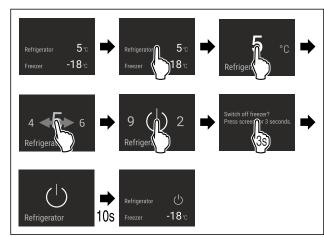


Fig. 9 Example illustration

Carry out action steps according to the illustration.
 Refrigerator compartment is switched off.

Switching the fridge compartment on

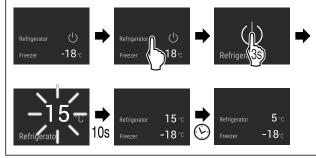

- Fig. 10 Example illustration
- Carry out action steps according to the illustration.
- ▷ Refrigerator compartment is switched on.
- \triangleright The appliance cools to the last set temperature.



Use this function to connect your appliance to WiFi. You can then operate it via the SmartDevice app on a mobile device. You can also use this function to disconnect or reset the WiFi connection.

More information on the SmartDevice: (see 1.3 SmartDevice)

Note

The SmartDevice function is not available in the following countries: Russia, Belarus, Kazakhstan.

Establishing the WiFi connection for the first time

Make sure that the following requirements are fulfilled:

- □ You have installed the SmartDevice app (see apps.home.liebherr.com).
- $\hfill\square$ Registration in the SmartDevice app is completed.





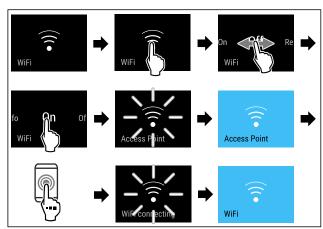


Fig. 12

Carry out action steps according to the illustration.
 Connection is established.

Disconnecting from the WiFi



Fig. 13

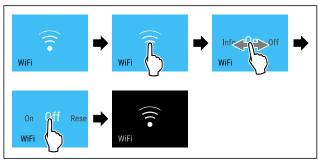


Fig. 14

Carry out action steps according to the illustration.
 There is no connection.

Resetting the WiFi connection



Fig. 15

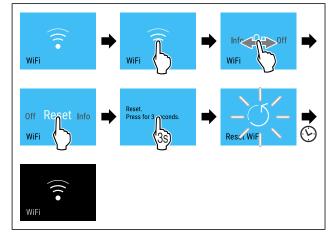


Fig. 16

- Carry out action steps according to the illustration.
- ▷ WiFi connection and other WiFi settings are reset to factory settings.

Showing information about the WiFi connection



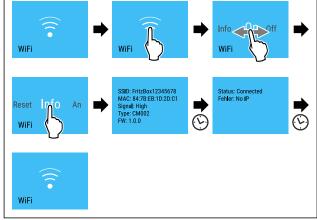


Fig. 18


• Carry out action steps according to the illustration.

⁵ Temperature

Use this function to set the temperature.

The temperature depends on the following factors:

- How often the door is opened
- How long the door is open for
- The room temperature of the installation site
- The type, temperature and amount of food

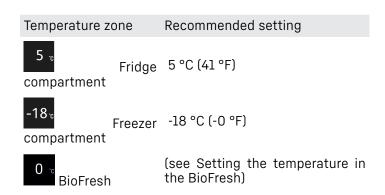

Setting the temperature in the refrigerator compartment

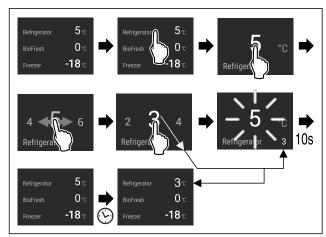


Fig. 19

Carry out action steps according to the illustration.
 Temperature is set.

Setting the temperature in the freezer compartment

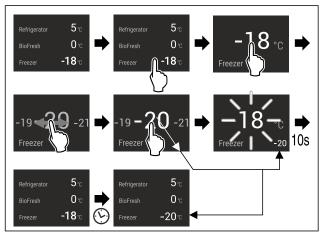


Fig. 20

Carry out action steps according to the illustration.
 Temperature is set.

Setting the temperature in the BioFresh

You can set the temperature using the **BioFresh B-**Value in the customer menu.



Temperature unit

Use this function to set the temperature unit. You can set the temperature unit in either degrees Celsius or degrees Fahrenheit.

Setting the temperature unit



Fig. 21

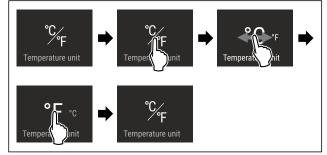


Fig. 22 Example illustration: Switching between degrees Celsius or degrees Fahrenheit.

Carry out action steps according to the illustration. ▷ Temperature unit is set.

B5 BioFresh B-Value

Use this function to set the BioFresh B-Value. Use the BioFresh B-Value to adjust BioFresh slightly warmer or colder if a higher or lower ambient temperature makes it necessary. Upon delivery, the BioFresh B-Value is set to the value B5. If you adjust the B-Value, please observe the following table:

Value	Description
B1	Lowest temperature
B1-B4	The temperature can drop to 0 °C (32 °F) which means foods could easily freeze.
B5	Pre-set temperature
B9	Highest temperature

Setting the BioFresh B-Value



Fig. 23

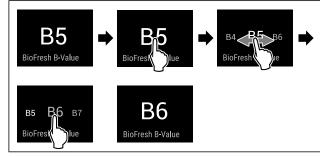


Fig. 24 Example illustration: Switching from B5 to B6.

- Carry out action steps according to the illustration. \triangleright The BioFresh B-Value is set.
- \triangleright Status display shows the target temperature.

D1 D-Value

The D-Value is preset for your appliance and must not be changed.



Select this function for the maximum cooling setting, to reach lower cooling temperatures.

This function is relevant to the fridge section Fig. 1 (A)

Use:

- Cool large amounts of food quickly.

Activating/deactivating settings

- ▶ Using the fridge section: activate the function when you add the goods.
- Activating/deactivating. -or-

Activate/deactivate using the SmartDevice app.

The function automatically turns off. The appliance goes back to normal mode. The temperature adjusts

VarioTemp

itself to the set level.

This function allows you to use the freezer compartment as an additional cooling zone. You can set the temperature from -2 °C (28 °F) to 14 °C (57 °F). If you activate this function, it may cause more noise. However, the appliance is still fully functional.

For storage of foodstuff in the freezer compartment with the VarioTemp function activated, Liebherr recommends:

Temperature range	Foodstuff			
4 °C (39 °F) 9 °C (46 °F)	to	Cooked preserves	foods,	cheese,
0 °C (32 °F)		Packaged f	ruit and veg	getables
-2 °C (28 °F)		Fresh fish a	ind seafood	ł

Temperature range	Foodstuff
10 °C (50 °F) to 14 °C (57 °F)	Cold-sensitive foodstuffs such as sweet potatoes, pumpkin or exotic fruits, food or drinks that should not be eaten too cold

Activating VarioTemp

Make sure that the following requirements are fulfilled:

□ The IceMaker has been cleaned. (see 9.6.5 Cleaning the IceMaker)



Danger of food poisoning!

Do not re-freeze defrosted food.

► Use defrosted foodstuff as quickly as possible.



Fig. 25

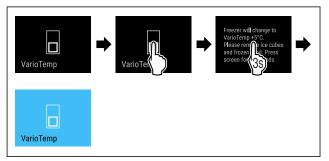


Fig. 26

- Carry out steps according to the illustration.
- ▷ VarioTemp is activated.
- \triangleright VarioTemp is set to the preselected value.
- > The status display does not show the set temperature until it is reached.

Adjusting VarioTemp

Make sure that the following requirements are fulfilled:

The VarioTemp has been activated. (see Activating VarioTemp)



Danger of food poisoning!

- Do not re-freeze defrosted food.
- Use defrosted foodstuff as quickly as possible.

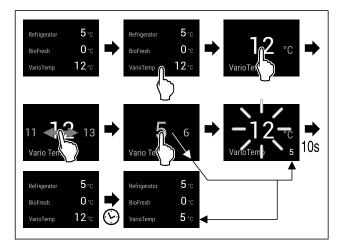


Fig. 27 Example illustration: Change VarioTemp from 12 °C (54 °F) to 5 °C (41 °F) for a fridge-freezer combination with BioFresh.

- Carry out steps according to the illustration.
- \triangleright VarioTemp is adjusted.
- ▷ The status display does not show the new set temperature until it is reached.

Deactivating VarioTemp



Fig. 28

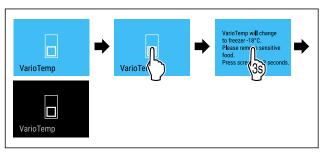


Fig. 29

- Carry out steps according to the illustration.
- ▷ VarioTemp is deactivated.
- > The freezer compartment is cooled to the preset temperature.

$*^{*}\!\!\times$ SuperFrost

Select this function for the maximum freezing setting, to reach lower freezing temperatures.

This function is relevant to the freezer section Fig. 1 (C).

Use:

- To freeze more than 2 kg (4.41 lb) fresh food a day.
- Freezing fresh food quickly to the core.
- Increasing the cold reserves in the stored goods before defrosting the appliance.

Activating/deactivating settings

With a small volume of frozen goods:

- Activate 6 hours before use. With the maximum volume of frozen goods:
- Activate 24 hours before use.
- Activate 24 hours before to
 Activating/deactivating .
- Activating/deactivating

-or-

► Activate/deactivate using the SmartDevice app.

The function automatically turns off. The appliance goes back to normal mode. The temperature adjusts itself to the set level.

*\

Start defrost cycle

Use this function to start the automatic defrost cycle manually if the defrost cycle does not start automatically in case of an error.

Starting the defrost cycle



Fig. 30

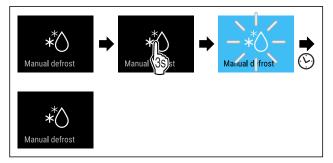


Fig. 31

- Carry out action steps according to the illustration.
- Defrost cycle has started: Symbol flashes until the defrost cycle is automatically completed.
- ▷ When the defrost cycle is completed: Appliance continues to run in normal operation.

Canceling the defrost cycle

The defrost cycle is automatically completed. However, you can also cancel the defrost cycle at any time during the defrosting:



Fig. 32

- Carry out action steps according to the illustration.
- \triangleright Defrost cycle is canceled.
- \triangleright Appliance continues to run in normal operation.

PartyMode

This function activates and deactivates PartyMode. PartyMode activates different functions that are useful for a party.

PartyMode activates the following functions:

- SuperCool (see SuperCool)
- SuperFrost (see SuperFrost)
- IceMaker with MaxIce (see IceMaker / MaxIce)


You can set all listed functions individually and flexibly. By deactivating PartyMode all changes are discarded.

If the function is active, the appliance operates at a higher output. As a result, the operating noise of the appliance may be temporarily louder, while energy consumption increases.

Activating PartyMode

Make sure that the following requirements are fulfilled:

□ IceMaker has been started for the first time. (see 4.3 Starting the IceMaker for the first time)



PartyMode \Rightarrow

Fig. 34

- Carry out action steps according to the illustration.
- PartyMode and the corresponding functions are activated.
- ▷ Temperature display turns blue.
- > The current temperature flashes until the target temperature is reached.

Deactivating PartyMode

PartyMode is automatically deactivated after 24 hours. However, you can also manually deactivate PartyMode at any time:





Fig. 35



Use

Fig. 36

- Carry out action steps according to the illustration.
- \triangleright PartyMode is deactivated.
- The appliance first cools to the set temperature: The current temperature flashes until the target temperature is reached.

HolidayMode

This function minimizes the energy consumption during an extended absence. The temperature of the refrigerator compartment is set to 15 °C (59 °F) and this is displayed on the status screen when the temperature has been reached.

The set freezer temperature remains unchanged.

This function is relevant to the fridge section Fig. 1 (A).

Use:

- Save energy if you plan to be away for a while.
- Avoid coming home to bad smells and mold.

Activating/deactivating settings

- Empty everything from the fridge section.
- Activating/deactivating.
- ▷ On: Fridge temperature is raised.
- \triangleright Off: The previously set temperature is restored.

🖤 SabbathMode

This function activates and deactivates SabbathMode. If you activate this function, some electronic functions are switched off. Your appliance thereby meets the religious requirements of Jewish holidays such as the Sabbath and complies with STAR-K Kosher certification.

Appliance status with active SabbathMode

The status display continuously shows SabbathMode.

All functions in the display except the **Deactivating SabbathMode function** are disabled.

Active functions remain active.

The display remains bright when you close the door.

The interior lighting is deactivated.

Memories are not listed. The set time interval is stopped.

Memories and warnings are not displayed.

There is no door alarm.

There is no temperature alarm.

The IceMaker is out of order.

The InfinitySpring is out of order.

The defrost cycle operates only for the specified time without taking into account the appliance usage.

Appliance status with active SabbathMode

After a power failure, the device returns to SabbathMode.

Appliance status

Note

This appliance has certification from the "Institute for Science and Halacha". (www.machonhalacha.co.il)

You can find a list of STAR-K-certified appliances at www.star-k.org/appliances.

Activating SabbathMode

Danger of poisoning from spoiled food!

If you have SabbathMode activated and a power failure occurs, no message appears in the status display about the power failure. Once the power is restored, the appliance continues to operate in SabbathMode. The power failure may mean that food spoils and the consumption of this food could lead to food poisoning. After a power failure:

Do not consume food that has been frozen and thawed.



Fig. 37



Fig. 38

• Carry out action steps according to the illustration.

▷ SabbathMode is activated.

▷ Status display continuously shows SabbathMode.

Deactivating SabbathMode

SabbathMode is automatically deactivated after 80 hours. However, you can also manually deactivate SabbathMode at any time:




Fig. 39

- Carry out action steps according to the illustration.
- \triangleright SabbathMode is deactivated.

\bigcirc EnergySaver

Use this function to activate or deactivate energy saving mode. If you activate energy saving mode, energy consumption drops and the temperature in the appliance increases. Food remains fresh, but shelf life is reduced.

Temperature zone		Recommended setting (see Temperature)	Temperature while Ener- gySaver is active
5 ℃ section	Fridge	5 °C (41 °F)	7 °C (45 °F)
-18₀ section	Freezer	-18 °C (-0 °F)	-16 °C (3 °F)

Temperatures

Activating EnergySaver



Fig. 40



Fig. 41

Carry out action steps according to the illustration. \triangleright Energy saving mode is activated.

Deactivating EnergySaver





Fig. 42



Fia. 43

- Carry out action steps according to the illustration.
- \triangleright Energy saving mode is deactivated.



IceMaker / Maxice

You can activate or deactivate ice cube production with the IceMaker function. Use the MaxIce function to increase the number of ice cubes in the IceMaker.

More information number of ice cubes:		the	(see specif	10.1 ications	Technical s)
More information IceMaker water inflow			(see inflow		iker water
More information on cleaning the lines of the IceMaker:			(see	TubeCle	ean)

If the function is active, the appliance operates at a higher output. As a result, the operating noise of the appliance may be temporarily louder, while energy consumption increases.

Activating IceMaker

Make sure that the following requirements are fulfilled:

- □ The water supply is established at the fixed water connection. See Assembly Manual.
- IceMaker is put into operation. (see 8.11 IceMaker)



Fig. 44

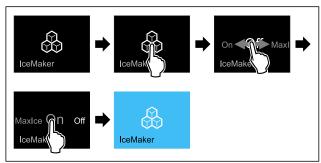


Fig. 45

- Carry out action steps according to the illustration.
- -or-Activate with the SmartDevice app.
- \triangleright IceMaker is activated. It can take up to 24 hours for the IceMaker to produce the first ice cubes.

Activating the IceMaker with MaxIce

If you have not activated the IceMaker function before, make sure that the following requirements are met:

- □ The water supply is established at the fixed water connection. See Assembly Manual.
- IceMaker is put into operation. (see 8.11 IceMaker)

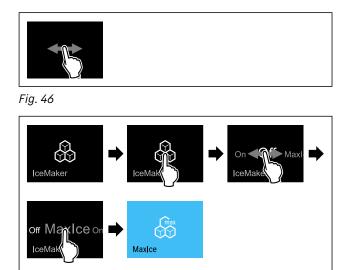


Fig. 47

Carry out action steps according to the illustration. -or-

- Activate with the SmartDevice app.
- \triangleright The IceMaker is activated with MaxIce.

Changing between the IceMaker and MaxIce

If you have activated IceMaker and would like to change to MaxIce:



Fig. 48

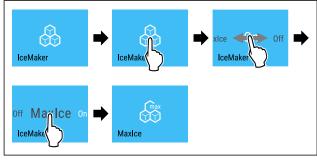


Fig. 49

Carry out action steps according to the illustration.
 The IceMaker is activated with MaxIce.

If you have activated MaxIce and would like to change to IceMaker:



Fig. 50

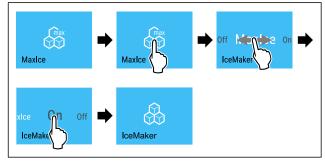


Fig. 51

- Carry out action steps according to the illustration.
- \triangleright IceMaker is activated.
- \triangleright MaxIce is deactivated.

Deactivating the IceMaker / MaxIce



Fig. 52

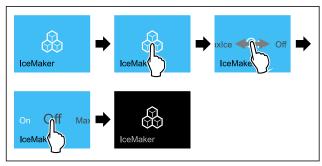


Fig. 53 Example illustration of the active IceMaker function ► Carry out action steps according to the illustration. -or-

- Deactivate with the SmartDevice app.
- \triangleright IceMaker and MaxIce are deactivated.
- \triangleright If ice cubes are currently being made, the system completes the process.
- \triangleright The IceMaker goes off automatically.

IceMaker water inflow

Use this function to set the IceMaker water inflow. The IceMaker water inflow regulates the water inflow volume. You can adjust the IceMaker water inflow if the water inflow does not match the water pressure and the dispensed ice cube size.

Upon delivery, the IceMaker water inflow is set to the value 5. You can select a value of between 1 (smallest inflow volume) and 8 (largest inflow volume).

Setting the IceMaker-water inflow

Make sure that the following requirements are fulfilled:

- □ IceMaker has been started for the first time. (see 4.3 Starting the IceMaker for the first time)
- IceMaker is activated. (see IceMaker / MaxIce)



Fig. 54

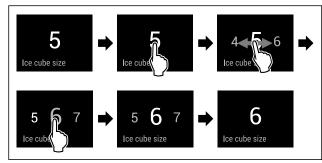


Fig. 55 *Example illustration: Switching from value* 5 *to value 6.*

Carry out action steps according to the illustration.

 \triangleright IceMaker water inflow is set.

🕙 TubeClean

This function activates or deactivates TubeClean. Activating TubeClean cleans the IceMaker lines.

Activating TubeClean

Make sure that the following requirements are fulfilled:

- □ IceMaker cleaning is prepared. (see 9.6.5 Cleaning the IceMaker)
- □ Empty container with a capacity of 1.5 l (1.59 qt) and with a maximum height of 10 cm (3 15/16 in) is ready.
- ▶ Place the container into the drawer below the IceMaker.



Fig. 56

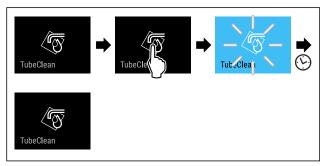


Fig. 57

- Carry out action steps according to the illustration.
- \triangleright TubeClean is activated.
- Cleaning process has started: Symbol flashes until the cleaning process is automatically completed after 60 minutes.
- ▷ When the cleaning process is completed: Appliance continues to run in normal operation.

Deactivating TubeClean

TubeClean is automatically completed after 60 minutes. However, you can also deactivate Tube-Clean at any time during the cleaning process:




Fig. 58

- ► Carry out action steps according to the illustration.
- ▷ TubeClean is deactivated: Cleaning process is canceled.
- \triangleright Appliance continues to run in normal operation.

CleaningMode

This function activates and deactivates CleaningMode. CleaningMode enables you to comfortably clean the appliance.

This setting relates to the fridge compartment.

Application:

- Clean the fridge compartment. (see 9.6 Cleaning the appliance)
- Clean the InfinitySpring. (see 9.6.4 Cleaning the InfinitySpring)

Appliance status with active CleaningMode

The status display continuously shows CleaningMode.

The fridge section is switched off.

The interior lighting is activated.

Reminders and warnings are not displayed. No signal tone is sounded.

The InfinitySpring is out of order.

Appliance status

Activating CleaningMode



Fig. 59



Fig. 60

- Carry out action steps according to the illustration.
- \triangleright CleaningMode is activated.
- ▷ Status display continuously shows CleaningMode.

Deactivating CleaningMode

CleaningMode is automatically deactivated after 60 minutes. However, you can also manually deactivate CleaningMode at any time:



Fig. 61

- Carry out action steps according to the illustration.
- \triangleright CleaningMode is deactivated.
- \triangleright The appliance first cools to the set temperature.

Display Brightness

Use this function to set the brightness of the display gradually.

You can set the following brightness levels:

- 40 %
- 60 %
- 80 %
- 100% (default setting)

Setting the display brightness



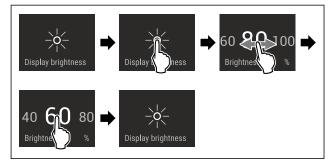


Fig. 63 Example illustration: Switching from 80 % to 60 %. Carry out action steps according to the illustration. \triangleright Display brightness is set.



Door alarm

Use this function to activate or deactivate the door alarm. The door alarm sounds if the door is open for too long. The door alarm is activated upon delivery. You can set how long to door can remain open until the door alarm sounds.

You can set the following values:

- 1 minute
- 2 minutes
- 3 minutes
- Off

Setting the door alarm



Fig. 64

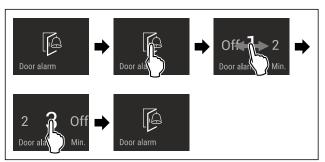


Fig. 65 Example illustration: Changing the door alarm from 1 minute to 3 minutes.

Carry out action steps according to the illustration. \triangleright Door alarm is set.

Deactivating door alarm



Fig. 67

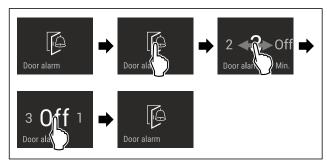


Fig. 68

Carry out action steps according to the illustration.

 \triangleright Door alarm is deactivated.

Input lock

This function activates and deactivates the input lock. The input lock prevents the appliance from being operated accidentally, e. g. by children.

Application:

- Prevent unintentional changes of functions.
- Prevent switching off of the appliance.
- Prevent unintentional temperature setting.

Activating the input lock

If you activate the input lock, you can continue to navigate in the menus, however you cannot select or modify other functions.



Fig. 69



Fig. 70

Carry out action steps according to the illustration.
 Input lock is activated.

Deactivating the input lock



Fig. 71



Fig. 72

Carry out action steps according to the illustration.
 Input lock is deactivated.

🕀 Language

Use this function to set the display language.

You can set the following languages:

- German
- English
- French
- Spanish
- Italian
- Dutch

- Czech
- Polish
- PortugueseRussian
- Russian - Chinese

Setting the language



Fig. 73

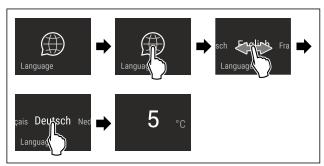


Fig. 74 *Example illustration depending on the language and temperature*

- ► Carry out action steps according to the illustration.
- \triangleright Language is set.
- \triangleright Display jumps back to the status display.

Appliance information

Use this function to display the model name, index, serial number and service number of your appliance. You will need the appliance information when you contact customer service. (see 10.4 Customer Service) You also use this function to open the expanded menu. (see 3 Functionality of the Touch & Swipe display)

Display appliance information



Fig. 75



Fig. 76

Carry out action steps according to the illustration.
 Display shows the appliance information.



Software

Use this function to display the software version of your appliance.

Display software version

|--|

Fig. 77



Fig. 78

Carry out action steps according to the illustration. ▷ Display indicates the software version.

Reminder

Reminders are displayed acoustically by a beep and visually by a symbol in the display. The signal gets louder until the alert stops.

Replace water filter

This message appears when the water filter needs replacing.

- ▶ Replace the water filter every 6 months.
- ► Confirm the message with OK.
- \triangleright The service interval resets.
- \triangleright The water filter guarantees the best water guality.

Replace the FreshAir active carbon filter

This message appears when the air filter needs replacing.

- Replace the air filter every six months.
- Confirm the message with OK.
- \triangleright The service interval resets.
- \triangleright The air filter guarantees the air guality in the fridge.

Activate setting

Activating/deactivating.

Demo mode

Demo mode is a special feature for dealers who want to demonstrate appliance features. If you activate demo mode, all refrigeration functions are deactivated.

If you switch on your appliance and "Demo" appears in the status display, then demo mode is already activated.

If you activate and then deactivate demo mode, the appliance will be reset to factory defaults. (see Resetting to factory settings)

Activating demo mode



Fig. 79

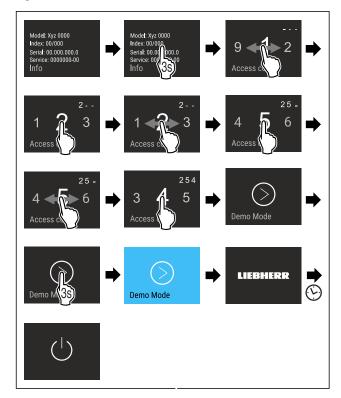


Fig. 80

- Carry out action steps according to the illustration.
- \triangleright Demo mode is activated.
- \triangleright Appliance is switched off.
- Switch on the appliance. (see 4.1 Switching on appliance (first use))
- \triangleright "DEMO" appears in the status display.

Deactivating demo mode



Fig. 81

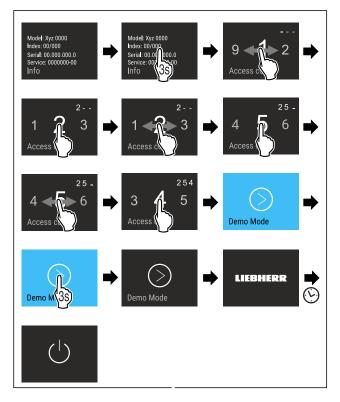


Fig. 82


• Carry out action steps according to the illustration.

- ▷ Demo mode is deactivated.
- \triangleright Appliance is switched off.
- Switch on the appliance. (see 4.1 Switching on appliance (first use))
- \triangleright Appliance is reset to factory settings.

Resetting to factory settings

Use this function to reset all settings to factory settings. All settings you have made so far are reset to their original settings.

Performing a reset



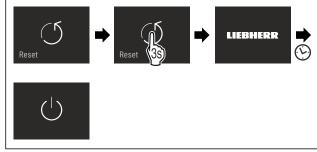


Fig. 84

• Carry out action steps according to the illustration.


- ▷ Appliance is reset.
- \triangleright Appliance is switched off.
- Restart the appliance. (see 4.1 Switching on appliance (first use))

7.3 Error messages

Error messages appear in the display. There are two categories of error message:

Category	Meaning
Message	Reminder of general procedures. You can carry out these procedures to eliminate the message.
Warning	Appears when there are malfunctions. A signal sounds in addition to the display. The signal becomes louder until you acknowl- edge by tapping the display. You can elimi- nate simple defects yourself. For more serious defects, you must contact customer service.

7.3.1 Warnings



This message appears if the door is open too long.

You can set the time before this message appears . ► Stop alarm: Confirm the message.

-or-

Close the door.



Power failure.

This message appears if the freezer temperature rises after a power outage. When the power outage is over, the appliance will continue to operate at the last temperature setting.

- Stop alarm: Confirm the message.
- ▷ Temperature alarm appears (see Temperature alarm).

Temperature alarm

This message appears if the freezer temperature does not match the set temperature.

Temperature differences may be caused by:

- Hot fresh food was placed in the appliance.
- When sorting and removing food from the appliance, too much warm ambient air got in.
- There has been a prolonged power outage.
- The appliance is faulty.

When the cause is eliminated, the appliance will continue to operate at the last temperature setting.

- Confirm the display.
- \triangleright Warmest temperature is displayed.
- Confirm the display again.

Equipment

- \triangleright The status display is displayed.
- ▷ Current temperature is displayed.



This message appears when there is a fault with the appliance. An appliance component has an error.

- ▶ Open the door.
- Take note of the error code.
- Confirm the message.
- \triangleright The signal tone stops.
- \triangleright The status display appears.
- Close the door.
- Contact customer service. (see 10.4 Customer Service)

7.3.2 Message



Insert IceMaker drawer

This message appears if the IceMaker drawer is open.

- Push in the IceMaker drawer.
- \triangleright The message disappears.
- \triangleright The IceMaker produces ice cubes.

8 Equipment

8.1 Door racks

8.1.1 Moving/removing door racks

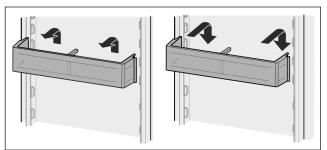


Fig. 85

- Slide racks up.
- Pull to the front.
- Re-insert in reverse order.

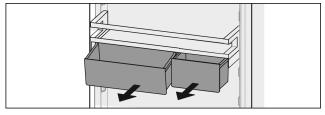


Fig. 86

You can use just one or both VarioBoxes. To store oversized bottles, suspend just one box over the bottle rack.

Move the VarioBox shelf:

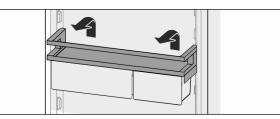


Fig. 87

Pull up and out.

Replace at any position.

Moving the VarioBoxes:

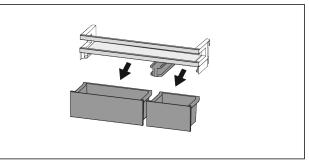


Fig. 88

If the door rack is removed:

Remove boxes.

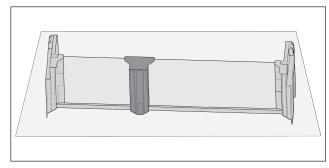


Fig. 89

Place the shelf on the table.

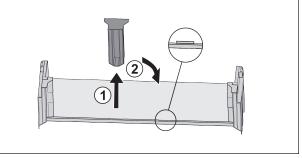


Fig. 90

- ▶ Pull off the middle holder *Fig. 90 (1)*.
- ▶ Insert the middle holder in the second position *Fig. 90 (2)*.

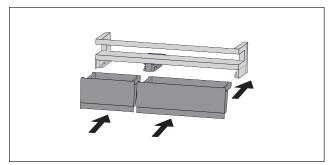


Fig. 91

▶ Replacing boxes.

8.1.2 To dismantle door racks

The door racks can be disassembled for cleaning.

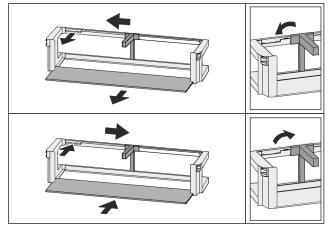


Fig. 92

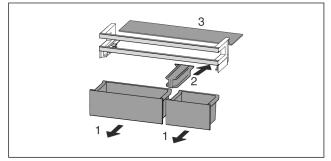


Fig. 93

▶ Disassemble the door racks.

8.2 Shelves

8.2.1 Moving/removing shelves



Danger of cuts.

Only remove storage shelves when there is nothing on them

Extension stops secure the shelves against being accidentally pulled out

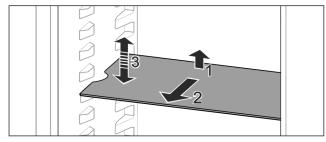


Fig. 94

- ▶ Lift the shelf and pull to the front.
- \triangleright Side recess to shelf position.
- Reposition the shelf: Lift up or lower to the desired height and insert. -or-





Fig. 95

- ▶ Take out the shelf completely: Pull out to the front.
- Easier removal: Set the shelf at an angle.
- ▶ Reinsert the shelf: Push it in to its stop limit.
- \triangleright Pull-out stoppers are pointing down.
- \triangleright Pull-out stoppers are behind the front shelf.

8.3 Split shelf

8.3.1 Using the split shelf



Broken shelves!

- Danger of cuts.
- Only remove storage shelves when there is nothing on them

Extension stops secure the shelves against being accidentally pulled out

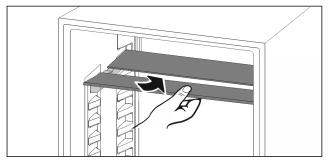


Fig. 96

Push the split shelf underneath as in the illustration

Equipment

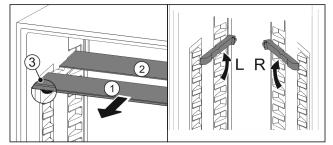


Fig. 97

Adjusting heights:

- Pull the glass panels out Fig. 97 (1) from the front, one at a time.
- Pull the support rails out of their retainers and snap into place at the height you want them.
- ▶ Slide in the glass panels one at a time.
- Flat pull-out stoppers at the front, right behind the support rail.
- \triangleright Taller pull-out stoppers at the back.

Using both shelves:

- Hold the bottom glass panel with one hand and pull it to the front.
- > The glass panel *Fig. 97 (1)* with the trim strip is at the front.
- ▷ The stops *Fig. 97 (3)* point downward.

8.4 InfinitySpring

The built-in water dispenser provides convenient drinking water. The water temperature depends on the temperature in the fridge.

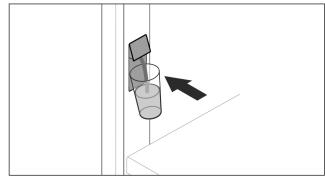


Fig. 98

- Push the glass against the button pushbutton of the dispenser.
- \triangleright The outlet unit moves out: water pours into the glass.
- Avoid splashes: Remove the glass slowly. If dispensing larger quantities of water:
- If the water flow stops, remove the water tank and push your container against the button push button of the dispenser again.

8.5 Space for baking tray

There is space for a baking tray $\it Fig.~1$ (6) above the drawers.

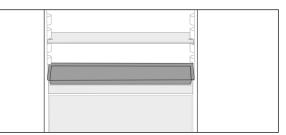


Fig. 99

Make sure that the following requirements are fulfilled

- □ Max. baking tray dimensions are adhered to (see 10.1 Technical specifications).
- Baking tray has cooled to room temperature.
- The bottom door stopper is set at least one position up.
 - When door 90° is open:
- Slide the baking tray onto the lower side runs.
- -or-

If baking tray is uneven:

► Use the supplied support rails.

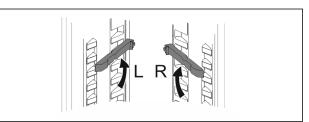


Fig. 100

- Snap support rails into the lowest runs. When door 90° is open:
- Slide the baking tray in on the support rails.

8.6 Variable bottle shelf

8.6.1 Using the bottle shelf

Use the variable bottle shelf or the glass panel placed on the fridge floor.

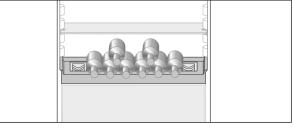


Fig. 101

- Remove the glass shelf and store separately.
- Place the bottles with the base pointing backwards facing the rear wall

Note

If the bottles protrude over the front of the bottle shelf: ► Move the bottom door rack higher up.

8.6.2 Removing the bottle shelf

You can remove the bottle shelf for cleaning. ▶ Remove the glass panel above the bottle shelf.

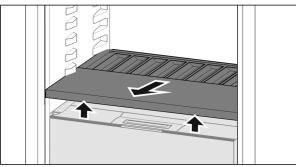


Fig. 102

▶ Lift the bottle shelf at the front and pull out.

Note

Liebherr recommends the following: Do not place any goods on the drawer cover below.

8.6.3 Inserting the bottle shelf

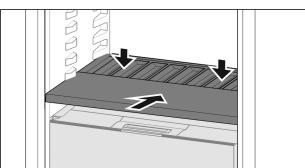


Fig. 103

- Slide in the bottle shelf until it engages and push down.
- > The lugs at the back of the bottle shelf are connected automatically.

 \triangleright LED lights up.

8.7 Drawers

You can remove the drawers for cleaning.

You can remove the drawers to use VarioSpace.

The way to remove/insert the drawers varies depending on the pull-out system. Your appliance can contain a variety of pull-out systems.

Note

Insufficient ventilation results in an increase in energy consumption and reduction of the refrigerating performance.

- Leave the bottom drawer in appliance!
- ▶ Never obstruct the vents on the interior rear wall!

8.7.1 Drawer on appliance base or glass shelf

The drawer runs directly on the appliance base or on a glass shelf. There are no rails.

When you remove the drawers, you can use the glass shelves below them as storage shelves.

Removing drawer

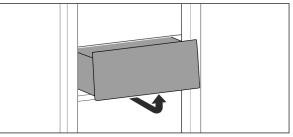


Fig. 104

▶ Remove drawer as shown in the diagram.

Inserting drawer

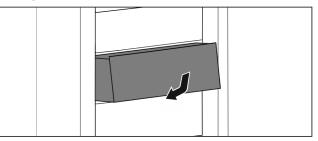


Fig. 105

▶ Insert drawer as shown in the diagram.

8.7.2 Drawer on telescopic rails

The drawer runs on full-extension rails (telescopic rails). There are full-extension telescopic rails and telescopic rails with partial pull-out. Drawers which are full extension can be pulled out fully from the appliance. Drawers with partial pull-out cannot be pulled out fully from the appliance. The system in your appliance depends on the type of appliance.

Full extension*

If you have full-extension rails, there is a clamp located at the back on the left and right of the rail.

Removing drawer

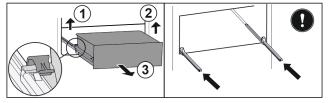


Fig. 106

- Pull out drawer as far as it will go.
- ► Lift left clamp and simultaneously pull drawer forwards on the left. *Fig. 106 (1)*

Equipment

- ► Lift right clamp and simultaneously pull drawer forwards on the right. *Fig. 106 (2)*
- Remove drawer to the front. *Fig. 106 (3)*
- ▶ Slide rails in.

Inserting drawer

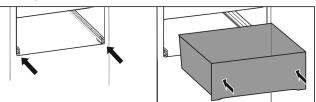


Fig. 107

- Slide rails in.
- ▶ Place drawer on rails.
- ▶ Slide in drawer to the back.
- \triangleright Drawer latches in audibly at the back.

Partial pull-out fridge compartment*

Removing drawer

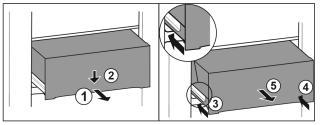


Fig. 108

- Pull out the drawer halfway. Fig. 108 (1)
- Press down the drawer on the front. Fig. 108 (2)
- Push in the left rail approximately 2 cm (13/16 in). Fig. 108 (3)
- Push in the right rail approximately 2 cm (13/16 in). Fig. 108 (4)
- Remove drawer to the front. *Fig. 108 (5)*

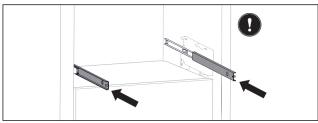


Fig. 109

If the rails are not yet fully pushed in after removing the drawer:

Push the rails in completely.

Inserting drawer

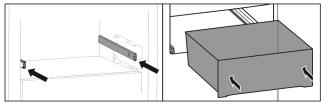


Fig. 110

- Slide rails in.
- Place drawer on rails.
- Slide in drawer to the back.

Partial pull-out freezing compartment

Note

If the magnet on the top drawer in the freezing compartment is damaged or removed, the door sensor will malfunction.

Do not damage or remove the magnet.

Removing drawer

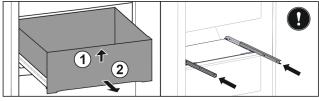


Fig. 111

If the drawer is in the top freezer:

- Pull out drawer as far as it will go.
- Lift up drawer at the front. *Fig. 111 (1)*
- Remove drawer to the front. *Fig. 111 (2)*
- Slide rails in.

-or-

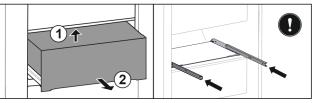


Fig. 112

If the drawer is in the middle of the freezing compartment:

- Pull out drawer halfway.
- ▶ Lift drawer from below at the back. *Fig. 112 (1)*
- Remove drawer to the front. *Fig. 112 (2)*
- Slide rails in.

Inserting drawer

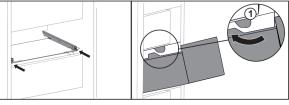


Fig. 113

- Slide rails in.
- ► Guide drawer around the stoppers *Fig. 113 (1)*.
- Place drawer on rails.
- Slide in drawer to the back.

8.8 Fruit & Vegetable-Safe cover

The compartment lid can be removed for cleaning.

8.8.1 Removing the compartment lid

Make sure that the following requirements are fulfilled Bottle shelf is removed (see 8.6 Variable bottle shelf).

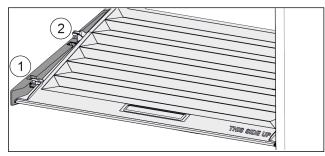


Fig. 114

If the drawers are removed:

- Pull the lid up at the front in the retaining parts to the opening Fig. 114 (1).
- Lift from the back and pull it up and out *Fig. 114 (2)*.

8.8.2 Inserting the compartment lid

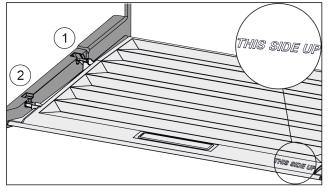


Fig. 115

If the text THIS SIDE UP is on top:

- ▶ Insert the lip of the cover over the opening of the rear bracket *Fig. 115 (1)* and click into place *Fig. 115 (2)*.
- Position the cover where you want it (see 8.9 Humidity control).

8.9 Humidity control

You can regulate the moisture in the drawer yourself by adjusting the compartment cover.

The compartment cover is on the drawer itself and can be covered with shelves or additional drawers.

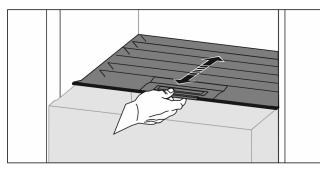


Fig. 116

Low air humidity

- Open the drawer.
- Pull the drawer cover to the front.
- \triangleright If the drawer is closed: Gap between lid and compartment.
- \triangleright Moisture levels lower in the Safe.

High air moisture:

- Open the drawer.
- Slide the compartment cover to the back.
- \triangleright If the drawer is closed: The cover seals the compartment.
- \triangleright Moisture levels rise in the Safe.
 - If there is too much moisture in the compartment:
- Choose a "low moisture setting".
- -or-
- Remove the moisture with a cloth.

Note

With the "low humidity" setting, the Fruit & Vegetable-Safe can also be used as a Meat & Dairy-Safe.

Choose a "low moisture" setting.

8.10 Glass shelves

You can remove the glass shelf under the drawers for cleaning.

You can remove the glass shelf under the drawers to use VarioSpace.

8.10.1 Removing / inserting the glass shelf

Make sure that the following requirements are fulfilled:

□ Glass shelf under the drawer: Drawer has been removed. (see 8.7 Drawers)

Removing glass shelf

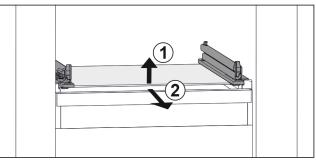


Fig. 117 Example illustration of glass shelf

- Lift glass shelf at the front. Fig. 117 (1)
- Remove glass shelf to the front. *Fig. 117 (2)*

Equipment

Inserting the glass shelf

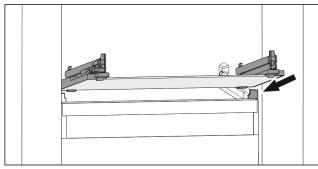


Fig. 118 Example illustration of glass shelf

- Position glass shelf at an angle behind the stoppers. (see Fig. 118)
- Lower glass shelf.
- Slide in glass shelf to the back.

8.11 IceMaker

The IceMaker is used exclusively for the production of ice cubes in household quantities.

Make sure that the following conditions are fulfilled

- IceMaker is cleaned (see 9 Maintenance).
- IceMaker drawer is cleaned.
- IceMaker drawer is fully inserted.

8.11.1 Producing ice cubes

The production capacity depends on the freezer temperature The lower the temperature, the more ice cubes can be produced in a certain period

Once IceMaker is switched on for the first time, it can take up to 24 hours to produce the first ice cubes.

- Activate the IceMaker .
- To make a large quantity of ice cubes: Activate the MaxIce.
- ► To make a large quantity of ice cubes: Move or remove the separators in the IceMaker drawer.
- Distribute ice cubes evenly in the drawer to increase its capacity.
- Close the drawer: The IceMaker starts making ice again.

Note

When a certain level is reached in the IceMaker drawer, it stops making ice cubes. The IceMaker does not fill the drawer to the very top.

8.11.2 Using the drawer with the IceMaker deactivated

If you deactivate the IceMaker, then you can use the entire IceMaker drawer as a freezer drawer.

Deactivate IceMaker. (see Deactivating the IceMaker / MaxIce)

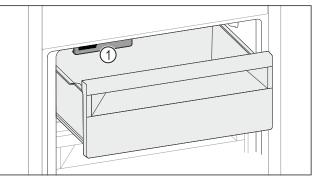


Fig. 119

- Place food in drawer.
- If you put food in the left side of the drawer:
- ▶ Pay attention to the IceMaker *Fig. 119 (1)*.

8.12 VarioSpace

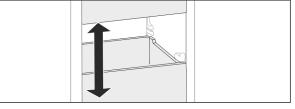


Fig. 120

You can remove drawers and glass panels from your appliance. This provides more room for large food items such as poultry, joints of meat, large game and bulky baked goods. You can then freeze these items whole for later preparation.

▶ Note the load limits on the drawers and glass panels (see 10.1 Technical specifications).

8.13 Butter dish

8.13.1 Opening/closing the butter dish

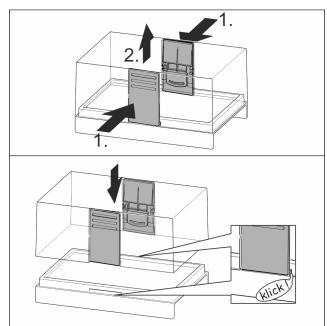


Fig. 121

8.13.2 Dismantling the butter dish

You can disassemble the butter dish for cleaning.

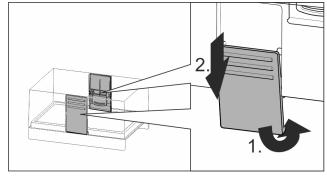


Fig. 122

▶ Disassemble the butter dish.

8.14 Egg rack

You can pull out and turn the egg rack. You can use both sides of the egg rack so you can label specifics like the purchase date.

8.14.1 Using the egg rack

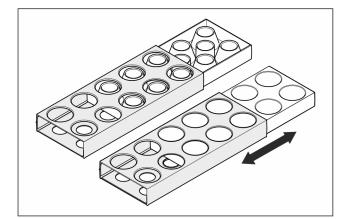


Fig. 123

- ▶ Top section: store hen eggs.
- ▶ Bottom section: store quail eggs.

8.15 Bottle rack

8.15.1 Using the bottle rack

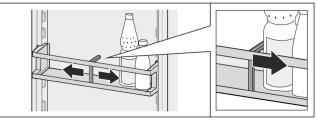


Fig. 124

Slide the bottle rack at the edges.

 \triangleright Stops bottles from tipping over.

8.15.2 Removing the bottle rack

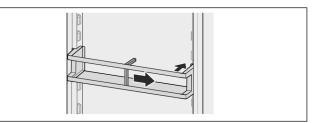


Fig. 125

- Slide the bottle rack all the way to the right edge.
- Remove to the back.

8.16 FlexSystem

8.16.1 Using the FlexSystem

The FlexSystem helps you store and arrange food clearly and in the way you want. It lets you clearly divide your food into fruit, vegetables or by use-by dates, for example.

Equipment

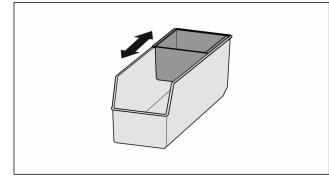


Fig. 126

Move the inside tray.

8.16.2 Removing the FlexSystem

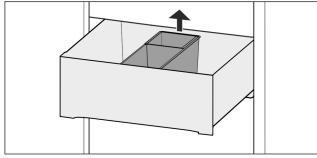


Fig. 127

- ▶ Lift the FlexSystem at the back.
- Pull up and out.

8.16.3 Inserting the FlexSystem

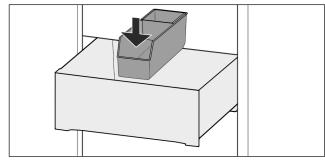


Fig. 128

- ► Insert front of the FlexSystem first.
- ► Lower the back part.

8.16.4 Disassembling the FlexSystem

The FlexSystem can be dismantled for cleaning.

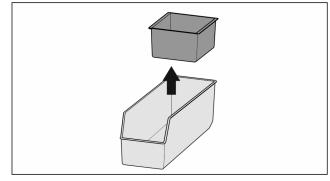


Fig. 129

▶ Dismantling the FlexSystem.

8.17 Freezer packs

The freezer packs prevent the temperature from rising too fast in the event of a power failure.

The freezer packs are in the drawer.

8.17.1 Using the freezer packs

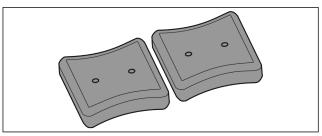


Fig. 130

When the freezer packs are fully frozen:

Place on the frozen goods in the top, front part of the freezer.

8.18 Ice cube tray with lid

8.18.1 Using the ice cube tray

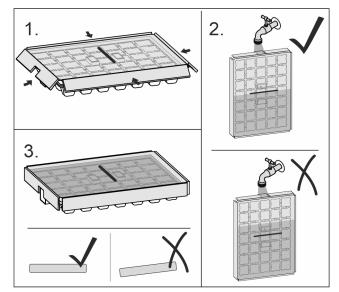


Fig. 131

When water is frozen:

- ► Hold the ice cube tray briefly under warm water.
- ▶ Remove the lid.
- Gently turn the ends of the ice cube tray in opposite directions.
- ▶ Release the ice cubes.

8.18.2 Dismantling the ice cube tray

You can dismantle the ice cube tray for cleaning.




Fig. 132

▶ Disassemble the ice cube tray.

8.19 Flexible ice compartment divider

The IceMaker's ice cube drawer has a flexible ice compartment divider. This allows you to store larger quantities of ice cubes or additional food items as needed. You can move or remove the ice compartment divider.

8.19.1 Moving the flexible ice compartment divider

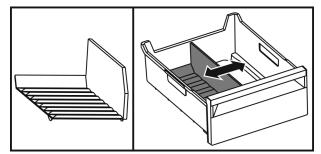


Fig. 133 Example illustration of the ice compartment divider
Move the ice compartment divider to the desired position.

8.19.2 Removing the flexible ice compartment divider

Make sure that the following requirements are fulfilled: Ice cube drawer is removed. (see 8.7 Drawers)




Fig. 134

- Lift the rear part of the ice compartment divider. *Fig. 134 (1)*
- ▶ Remove the ice compartment divider upwards. *Fig. 134 (2)*

8.19.3 Putting in the flexible ice compartment divider

Make sure that the following requirements are fulfilled: I ce cube drawer is removed. (see 8.7 Drawers)




Fig. 135

- Insert the front part of the ice compartment divider. Fig. 135 (1)
- Lower the rear part of the ice compartment divider to the drawer bottom. Fig. 135 (2)

9 Maintenance

9.1 FreshAir carbon filter

The FreshAir carbon filter is located in the compartment above the fan.

It guarantees the best air quality.

- Change the carbon filter every 6 months. When the reminder is set, a message on the display prompts you to change it.
- □ You can dispose of the carbon filter with the regular household waste.

Maintenance

Note

FreshAir activated charcoal filters can be purchased from the Liebherr Service Center. The address for your respective country can be found on the back of the instructions.

9.1.1 Removing the FreshAir carbon filter

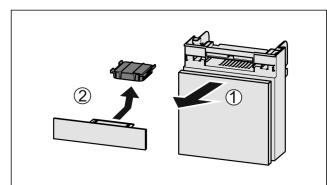


Fig. 136

- ▶ Pull out the compartment *Fig. 136 (1)*.
- Remove the carbon filter *Fig. 136 (2)*.

9.1.2 Inserting the FreshAir carbon filter

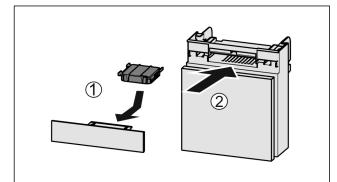


Fig. 137

- ▶ Insert the carbon filter as shown in the diagram *Fig. 137 (1).*
- \triangleright The carbon filter clicks into place.
- If the carbon filter is pointing downwards:
- Push the compartment in *Fig. 137 (2)*.
- \triangleright The carbon filter is now ready for use.

9.2 Water tank

The InfinitySpring is located behind the lowest drawer in the fridge section.

9.2.1 Removing the water tank

- ► Turn off the water tap.
- Run the InfinitySpring for 30 seconds and collect the remaining water in a glass.
- Remove the drawer.
- Turn the water tank all the way to the left and pull it out.
- \triangleright Water dripping out is collected in the drip tray.

- ▶ Drain the water from the drip tray.
- Clean the drip tray with a cloth or in the dishwasher.

9.2.2 Inserting the water tank

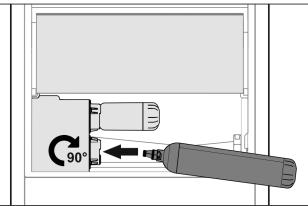


Fig. 138

- Remove the drawer.
- Insert the water tank and turn approx. 90° to the right until it engages.
- Check that the water tank is sealed and no water leaks out.
- ▶ Insert the drawer.
- ▶ Turn on the water tap.
- Bleed the water system. (see 4.2.1 Vent the water system)


Instead of the water filter, you can use an additional water tank.

Note

The water tank is available as a spare part.

9.2.3 Removing / inserting the drip tray

You can remove the drip tray for cleaning.

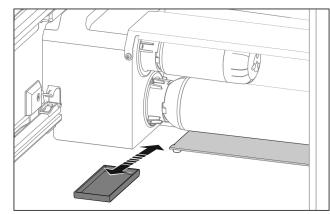



Pull out the drip tray to the front.

9.3 Water filter

The water filter is located behind the lowest drawer in the fridge section.

It absorbs deposits in the water and reduces the taste of chlorine.

- Replace the water filter at least every 6 months under the specified usage conditions or if the flow rate drops significantly.
- The water filter contains carbon and can be disposed of with the regular household waste.

Note

The water filter can be purchased from the Liebherr Service Center. The address for your respective country can be found on the back of the instructions.

9.3.1 Removing the water filter

- ▶ Remove the drawer.
- Turn the water filter all the way counterclockwise and pull it out.
- ▷ Water dripping out is collected in the drip tray.
- Clean the drip tray with a cloth or in the dishwasher.

9.3.2 Installing the water filter

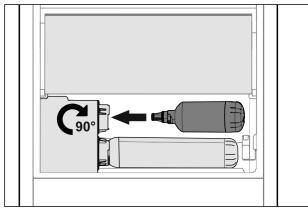


Fig. 140

Make sure that the following conditions are fulfilled

- □ Water pressure is maintained (see Installation Instructions, Water Connection).
- ▶ Remove the drawer.
- Insert the water filter and turn clockwise approx. 90° until it engages.
- Make sure the filter does not leak and no water is coming out.
- Insert the drawer.

New water filters may contain particulate matter.

- Draw 3 l (3 qt) of water from the InfinitySpring and dispose of it.
- \triangleright The water filter is now ready for use.

9.4 Disassembling / assembling pullout systems

9.4.1 Notes on disassembly

You can disassemble some of the pull-out systems for cleaning. Your appliance can contain a variety of pull-out systems.

The following pull-out systems can be disassembled or cannot be disassembled:

Pull-out system	can be disassembled / cannot be disassembled		
Drawer on appliance base or glass shelf	cannot be disassembled		
Full extension*	cannot be disassembled*		
Partial pull-out fridge compartment*	cannot be disassembled*		
Partial pull-out freezer compartment	can be disassembled (see Partial pull-out freezing compartment)		

9.4.2 Drawer on telescopic rails

Partial pull-out freezing compartment

Disassembling pull-out system

Make sure that the following requirements are fulfilled:

- $\hfill\square$ Drawer has been removed.
- $\hfill\square$ Glass shelf has been removed. (see 8.10 Glass shelves)


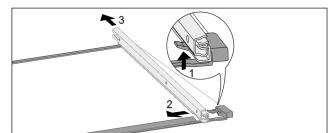


Fig. 141 Glass shelf with rails

- ▶ Push up front click-in hooks. *Fig. 141 (1)*
- Slide pull-out rails to the side Fig. 141 (2) and backwards Fig. 141 (3).

Installing pull-out system

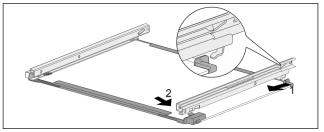

- Fig. 142 Glass shelf with rails
- Hook in rail at the back. Fig. 142 (1)

Hook in rail at the front. *Fig. 142 (2)*

9.5 Defrosting the appliance

9.5.1 Defrosting the refrigerator compartment

Defrosting is performed automatically. The water from the thawing process runs out via the drain opening and is evaporated.

Clean the drain opening regularly (see 9.6 Cleaning the appliance).

9.5.2 Defrosting the freezer compartment with NoFrost

Defrosting is performed automatically by the NoFrost system. The moisture condenses on the evaporator and is periodically defrosted and evaporated.

The appliance does not have to be defrosted.

9.6 Cleaning the appliance

9.6.1 Preparation



Danger of electric shock.
 Unplug refrigerator or disconnect power.



Danger of fire

- ▶ Do not damage the refrigerant circuit.
- Empty appliance.
- Pull out the power plug.
- -or-
- Activate CleaningMode. (see CleaningMode)

9.6.2 Cleaning the interior

NOTICE

Improper cleaning!

- Damage to the appliance.
- Only use soft cleaning cloths and ph-neutral allpurpose cleaners.
- Do not use steel wool or sponges that scour or scratch.
- Do not use caustic or abrasive cleaning materials or those containing sand, chloride, or acids.
- ▶ Plastic surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.
- Metal surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.
- Drain hole: remove any deposits with a thin item such as a cotton bud.

9.6.3 Cleaning the equipment

NOTICE

Improper cleaning!

Damage to the appliance.

- Only use soft cleaning cloths and ph-neutral allpurpose cleaners.
- Do not use steel wool or sponges that scour or scratch.
- Do not use caustic or abrasive cleaning materials or those containing sand, chloride, or acids.

Clean with a soft, clean cloth, lukewarm water and a little washing up liquid:

- Fruit & Vegetable-Safe cover
- Drawer
- Please note: Do not remove the magnet on the drawer. The magnet ensures that the IceMaker functions.
- Divider in the IceMaker drawer
- Variable bottle shelf
- FlexSystem

Clean with a damp cloth:

 Retracting rails Please note: the grease in the tracks is there for lubrication purposes and must not be removed!

Clean in the dishwasher up to 60 °C (140 °F):

- Door racks
- VarioBox
- Bottle rack
- Shelf
- Split shelf
- Holder for the split shelf
- Drip tray
- Egg rack
- Butter dish
 Ice cube trav
- Ice cube tray
 Ice cube scoop
- Disassemble the equipment: see the relevant section.
- Clean the equipment.

9.6.4 Cleaning the InfinitySpring

You can clean the InfinitySpring outlet and around it without disconnecting the appliance from the mains.

We recommend cleaning in the following situations:

- □ Initial commissioning
- □ If out of use for longer than 5 days.
- ▶ Press the bottom pushbutton of the dispenser.
- \triangleright The outlet unit moves out.
- Clean the water outlet and around it with a soft, damp cloth, lukewarm water and a little washing up liquid.
- ▶ Release the bottom pushbutton.
- Draw and dispose of 2 l (2.11 qt) water at the Infinity-Spring.

9.6.5 Cleaning the IceMaker

There are various options for cleaning the IceMaker.

We recommend cleaning in the following situations:

- Initial commissioning
- □ With water connection:
- If out of use for longer than 5 days.

Make sure that the following requirements are met:

- □ IceMaker drawer is emptied.
- $\hfill\square$ IceMaker drawer is fully inserted.
- $\hfill\square$ The IceMaker has been activated.

On first use or if not used for prolonged periods

Clean the IceMaker with TubeClean.

- Put an empty 1.5 l (1.59 qt) vessel (max. height 10 cm (3 15/16 in)) in the drawer under the IceMaker.
- Activate the TubeClean function.
 The rinse process is prepared (max. 60 min.): The
- symbol flashes.
- ▷ Water pipes are rinsed: Symbol flashes.
- ▷ Rinsing process is complete: Function turns off automatically.
- Take out the IceMaker drawer and remove the container.
- Clean the IceMaker drawer with warm water and a little detergent.
- ▶ Push in the IceMaker drawer.
- \triangleright Ice cube production starts automatically.
- Dispose of any ice cubes that are produced within 48 hours of the first ice cube production.

-or-

Draw 2 l (2.11 qt) of water from the InfinitySpring and dispose of it.

When cleaning is required

Clean the IceMaker manually.

- Remove the IceMaker drawer and clean with warm water and a little detergent.
- ▶ Push in the IceMaker drawer.
- \triangleright Ice cube production starts automatically.

9.6.6 After cleaning

- ▶ Wipe dry the appliance and items of equipment
- Connect and switch on the appliance.
- Activate SuperFrost (see 7.2 Appliance functions).
 When the temperature is sufficiently cold
- Place the food inside.
- ► Repeat cleaning regularly.

10 Customer support

10.1 Technical specifications

Temperature zone				
Cool:	3 °C (36 °F) to 9 °C (46 °F)			
BioFresh	0 °C (32 °F) to 3 °C (37 °F)			

Temperature zone					
Freezing	-26 °C (-15 °F) to -15 °C (5 °F)				
Maximum freezing quantity/24 h					
Freezer	See "Freezing capacity/24 h" on the type plate				
Max. door capacity	,				
Number of drawers, freezer	Top door		Botto	om door	
3 drawers	10 kg (22.0	5 lb)			
Max. equipment ca	pacity				
Equipment	Appliance width 550 mm (21 5/8 in) (see installa- tion instruc- tions, appliance dimen- sions)		n mm /2 in) Ila- JC- ance n-	Appliance width 700 mm (27 9/16 in (see installa- tion instruc- tions, appliance dimen- sions)	
Drawer on glass shelf (see 8.7.1 Drawer on appliance base or glass shelf)	12 kg (26.46 lb)	15 (33.0	kg 17 lb)		
Partial pull-out reezer compart- ment see 8.7.2 Drawer on telescopic rails)	12 kg (26.46 lb)	15 (33.0	kg 17 lb)		
Max. size baking tr	ау				
Width	466 mm (18	8 3/8	in)		
Depth 386 mm (15 3/2		5 3/16	in)		
Height	50 mm (1 15/16 in)				
Ice cube productio	n with IceMa	aker			
lce cube produc- tion/24 h					
Maximum ice cube production/ 24 h	When the MaxIce function is active: 1.5 kg (3.31 lb) of ice cubes				

Time required to reach various temperatures with VarioTemp					
Initial tempera- ture	Target tempera- ture	Time required to reach target temper- ature			
-18 °C (-0 °F)	0 °C (32 °F)	>8 h			
-18 °C (-0 °F)	8 °C (46 °F)	>12 h			
8 °C (46 °F)	14 °C (57 °F)	>6 h			
14 °C (57 °F)	-18 °C (-0 °F)	>4 h			

For appliances with a WiFi connection:

Frequency specification				
Frequency band	2.4 GHz			
Maximum radi- ated power	< 100 mW			
	Integration in the local WiFi network for data communication			

10.2 Operating noises

The appliance makes noises while in operation.

- At **less cooling output** the appliance saves energy but takes longer to cool items. The volume is **lower**.
- At **a higher cooling output** the food cools more quickly. The volume is **higher**.

Examples:

- Activated functions (see 7.2 Appliance functions)
- Running fan
- Freshly sorted food
- High ambient temperature
- Door opened for long periods

Noise		Possible cause	Type of noise
Bubbling splashing	and	Coolant is flowing into the cooling circuit.	Normal noise
Spitting hissing	and	Coolant is spraying into the cooling circuit.	Normal noise

Noise		Possible	cause	Тур	e of noise	
Humming		cools.	The depends		mal noise	
Sipping noises		The self-closing Normal noise door is being opened and closed.				
Whirring and murmuring		The f running.	an is Normal ope ating noise			er-
Clicking				Normal switching noise		
Rattling or humming		Valves active.	are		mal tching nois	е
Noise	Pos cau	sible se	Type noise	of	How resolve	to
Vibration	Unsuitable installation		Error noi	se	Check installatio Set up tl appliance.	he
Clattering	Equipment, Objects inside the appliance		Error noi	se	Secure equipment parts. Leave a ga between items.	

10.3 Technical faults

Your appliance is designed and manufactured for reliable operation and a long service life. If a malfunction nonetheless occurs during operation, please check whether the malfunction is due to an operating error. In this case, you will have to be charged for the costs incurred, even during the warranty period.

You may be able to rectify the following faults yourself.

10.3.1 Appliance function

Defect	Cause	Remedy
The appliance	The appliance is not switched on.	Switch on the appliance.
does not work.	The power plug is not properly inserted in the wall socket.	Check the power plug.

Defect	Cause	Remedy
	The powerfuse in the wall socket is not OK.	 Check the fuse.
	Power failure.	 Keep the appliance closed. Protect your food: Lay freezer packs on top of the food or use another freezer if the power is off for a prolonged period. Do not re-freeze defrosted food.
	The appliance connector is not correctly inserted in the appliance.	 Check the appliance connector.
The temperature is not cold enough	This means that the door of the appliance is not closed properly	 Close the appliance door
	Insufficient ventilation	Clear and clean the ventilation grille.
	The ambient temperature is too high	Problem solution: (see 1.4 Range of appliance use)
	The appliance was opened too frequently or for too long	 Wait to see if the required temperature corrects itself. If not, contact Customer Service. (see 10.4 Customer Service)
	Too much fresh food was placed inside without SuperFrost.	 Solution: (see SuperFrost)
	The temperature is incorrectly set	Set to a colder temperature and check after 24 hours.
	The appliance is too near to a heat source (stove, heater etc).	Change location of appliance or the heat source.
	The appliance was not properly installed in the recess.	Make sure the appliance was installed correctly and the door closes properly.
The door seal is defective or should be replaced for other reasons.	The door seal is interchangeable. You can replace it without the use of any special tools.	 Contact Customer Service. (see 10.4 Customer Service)
The appliance is iced up or condensation is building.	The door seal may have slipped out of its groove.	 Check the door seal is well placed in the groove.

10.3.2 Equipment

Defect	Cause	Remedy
The IceMaker cannot be switched on.	The appliance and therefore the IceMaker are not connected.	 Connect the appliance (see Installation Guide).
The IceMaker is not making any ice cubes.	The IceMaker is not switched on.	 Activate the IceMaker.

Defect	Cause	Remedy
	The drawer of the IceMaker is not properly closed	 Close the drawer properly
	The water connection is not open	 Open the water connection
The IceMaker is not working.	There is air in the system.	 Vent the water system (see Installation Instruc- tions, Water Connection).
The Infinity- Spring is not working.	The ice cube tray rotates.	 Tray again after 1 minute.
	There is air in the system.	Vent the water system (see Installation Instruc- tions, Water Connection).
	The water connection is not open	 Open the water connection
The water flow at the Infinity- Spring is irreg- ular.	The aerator is not clean.	 Replace aerator. Contact Customer Service. (see 10.4 Customer Service)
The interior light does not turn on.	The appliance is not switched on.	 Switch on the appliance.
	The door was open for longer than 15 min.	The interior light automatically switches itself off if the door stays open for approx. 15 min.
	The LED interior light is faulty or the lid is damaged.	 Contact Customer Service. (see 10.4 Customer Service)

10.4 Customer Service

First check whether you can rectify the fault yourself (see 10 Customer support) . If you cannot rectify the problem, contact Customer Service.

You can find the address in the enclosed brochure "Liebherr-Service" or at home.liebherr.com/service.



Unprofessional repair! Injuries.

- ► A damaged power cable may only be replaced by the manufacturer, the manufacturer's Customer Service or a similarly qualified person.
- ► For appliances with plug and play connection cables, the change can be made by the customer.

10.4.1 Contacting Customer Service

Make sure that the following appliance information is available:

- □ Appliance name (model and index)
- □ Service no. (service)
- 🗅 Serial no. (S no.)
- Call up the appliance information via the display. (see Appliance information)

-or-

 Refer to the type plate for appliance information. (see 10.5 Rating plate)

- ► Take note of the appliance information.
- Notify customer service: Report errors and the appliance information.
- \triangleright This will help us give you fast and accurate support.
- ► Follow further instructions from Customer Service.

10.5 Rating plate

The nameplate is located behind the drawers on the inside of the appliance.




Fig. 143

(1) Appliance name (3) Serial no.

(2) Service no.

► Information from the nameplate.

11 Decommissioning

- Empty appliance.
- Deactivate IceMaker. (see Deactivating the IceMaker / MaxIce)
- Switch off appliance. (see Turn off appliance)

- Pull out the power plug.
- Remove the appliance connector if necessary: Pull it out and, at the same time, move it from the left to the right.
- Clean appliance. (see 9.6 Cleaning the appliance)
- ► Leave the door open to prevent unpleasant odors.

12 Disposal

12.1 Preparing the appliance for disposal



Risk of child entrapment!

- Before you throw away your old refrigerator or freezer:
 Take off the doors.
- Leave the shelves in place so that children may not
- easily climb inside.



Liebherr uses batteries in some of its appliances. You should remove these before disposal of the old appliance for environmental reasons. If your appliance contains batteries, a corresponding notice is attached to the appliance.

- Lamps If you can remove the lamps yourself without destroying them, also remove these before disposal.
- ► Take the appliance out of operation.
- ► Appliance with batteries: Remove the batteries. For description, see **Maintenance** chapter.
- ▶ If possible: Remove lamps without destroying them.

12.2 Disposing of the appliance in an environmentally friendly manner



The appliance still contains valuable materials and must be collected separately from unsorted municipal waste so it can be recycled. -lon LI-lon

Dispose of batteries separately from the old appliance. Certain batteries should NOT go in household garbage or recycling bins. Waste batteries can always be recycled or taken to household hazardous waste collection points. To prevent fires from lithium-ion batteries, tape battery terminals and/or place batteries in separate plastic bags and never put these batteries in household garbage or recycling bins.

Dispose of removed lamps via the respective collection systems.

Check the Responsible Appliance Disposal (RAD) program to find a RAD partner near you.

Follow your local guidance about recycling and disposal capabilities near you.

Lamps

For USA:

For Canada:

Leaking refrigerant and oil!

Fire. The refrigerant contained within the appliance is environmentally friendly, but flammable. The oil contained within the appliance is flammable. Escaping refrigerant and oil can ignite if they are of high enough concentration and are exposed to an external heat source.

- Do not damage the pipelines of the coolant circuit and the compressor.
- ▶ Transport the appliance away without damaging it.
- Dispose of batteries, lamps, and the appliance according to the above specifications.



home.liebherr.com/fridge-manuals

EN Built-in combined fridge-freezer with BioFresh

Issue date: 20240226

Part number index: 7088430-00

For Service in the U.S.: Liebherr Service Center Toll Free: 1-866-LIEBHER or 1-866-543-2437 Service-appliances.us@liebherr.com PlusOne Solutions, Inc. 3501 Quadrangle Blvd, Suite 120 Orlando, FL 32817 For Service in Canada: Liebherr Service Center Toll Free: 1-888-LIEBHER or 1-888-543-2437 www.euro-parts.ca EURO-PARTS CANADA 39822 Belgrave Road, Belgrave, Ontario, NOG 1E0 Phone: (519) 357-3320 | Fax: (519) 357-1326