

## KMR 1136-3 G GD EDST/CLST RangeTop



- Professional design – 36 (914) in (mm) wide in stainless steel with Clean Touch Steel™ finishing
- Direct control – metal knobs with light ring
- Easy cleaning – ComfortClean dishwasher-safe grates
- Broad performance spectrum – burner w. up to 19,500 BTU (5.7 kW)
- Convenient and safe – automatic re-ignition for all burners

EAN: 4002516495437 / Material number: 11852460 / Old Material Number: 26113670USA

<b>Heating type</b>	
Fuel type	Gas
<b>Construction type</b>	
Rangetop	•
<b>Design</b>	
Casing	Stainless steel
Front panel	CleanSteel
Genuine metal knobs	•
Cast iron pot rests (matte black enameled)	•
<b>Ring features</b>	
Number of gas burners	4
Number of griddle surfaces	1
<b>1st cooking zone/cooking area</b>	
Position	front left
Type	Ultra high-speed burner
Minimum power output in BTU/hr	1700
Maximum power output in BTU/hr	19500
Max. rating in W	5700
<b>2nd cooking zone/cooking area</b>	
Position	rear left
Type	High-speed burner
Minimum power output in BTU/hr	1200
Maximum power output in BTU/hr	12500
Max. rating in W	2300
<b>3rd cooking zone/cooking area</b>	
Position	Centered
Type	Griddle surface
Maximum power output in BTU/hr	13000
Max. rating in W	5600
<b>4th cooking zone/cooking area</b>	
Position	rear right
Type	High-speed burner
Minimum power output in BTU/hr	1700
Maximum power output in BTU/hr	19500
Max. rating in W	2600
<b>5th cooking zone/cooking area</b>	
Position	front right
Type	Ultra high-speed burner
Minimum power output in BTU/hr	1700
Maximum power output in BTU/hr	19500
Max. rating in W	5700
<b>8th cooking zone/cooking area</b>	
True Simmer function	•
Width of griddle surface in in.(mm)	10 1/4 (258)
Depth of griddle surface in in.(mm)	17 1/8 (434)
<b>Control panel</b>	
Operation via genuine metal knobs with backlit	•
<b>Cleaning convenience</b>	
Dishwasher-safe trivets	•
Single-piece cooktop surround	•

KMR 1136-3 G GD EDST/CLST  
RangeTop



EAN: 4002516495437 / Material number: 11852460 / Old Material Number: 26113670USA

#### Safety

Automatic re-ignition

•

#### Technical data

Dimensions (width) in in. (mm) 36 (914)

Height in in. (mm) 7 5/8 (191)

Dimensions (depth) in in. (mm) with bullnose 27 1/4 (692)

Dimensions (depth) in in. (mm) without bullnose 25 5/8 (650)

Weight in lbs. (kg) 152 (69)

Total output in BTU/hr 84000

Total connected load in kW 24.60


Voltage in V 120

Fuse rating in A 10

Number of phases 1

Power cord length in in. (m) 3 (1.2)

## KMR 1136-3 G GD EDST/CLST RangeTop

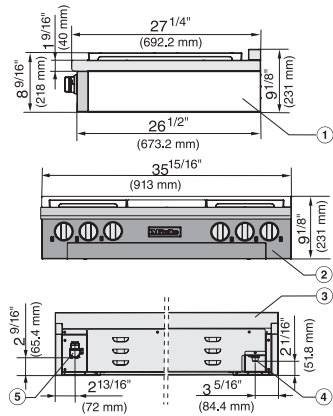

KMR1134, KMR1135, KMR1136, KMR1134-3, KMR1135-3, KMR1136-3 (Installation drawing)

1) Side view, 2) Front view, 3) Rear view, 4) Gas Connection, 5) Electrical connection