

SEDONA BY LYNX™ SERIES

## 42" SEDONA BUILT-IN GRILL

WITH 3 STAINLESS STEEL BURNERS (L701)







OPEN VIEW

## L701 PRODUCT OVERVIEW

- Variable power—three stainless steel burners combining to provide up to 69,000 BTU
- Dependable performance—direct spark ignition with battery backup
- Perfect clarity—dual halogen grill surface lights
- Quick visibility—temperature gauge
- Easy opening—Lynx Hood Assist
- Generous capacity—1,049 square inches of cooking surface (728 primary, 321 secondary)
- Beautiful illumination—blue-lit control knobs
- Smooth opening—fluid rotation handle
- Premier platform—stainless steel grilling grates
- Steadfast durability—heavy-duty welded construction eliminates gaps where grease can collect
- Understated luxury—brushed stainless steel finish on canopy, bullnose, and drip tray
- Installation into a combustible enclosure requires an insulated jacket accessory





## **L701 PRODUCT FEATURES**

The Sedona by Lynx™ Series is always evolving to be the best at something new. That philosophy is reflected in its features.

We've refined these features to give you a grilling experience that's both simple and stunning.



STAINLESS STEEL BURNERS




SPARK IGNITION SYSTEM



**EXPANSIVE GRILLING SURFACE** 



INTEGRATED ILLUMINATION




LYNX HOOD ASSIST



**CERAMIC RADIANT BRIQUETTES** 

FOR MORE
INFORMATION ON
SEDONA BY LYNX™ SERIES
PRODUCT FEATURES,
PLEASE VISIT
LYNXGRILLS.COM

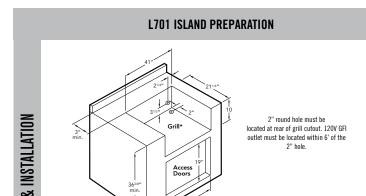



CUT-OUT DIMENSIONS: WIDTH: 41" / HEIGHT: 10" / DEPTH: 21.25"



SHIPPING DIMENSIONS: WIDTH 34" / HEIGHT 47" / DEPTH 30" SHIPPING WEIGHT: 240 POUNDS



PRODUCT TECHNICAL SPECIFICATIONS


**GAS REQUIREMENTS:** SHIPS IN LIQUID PROPANE OR NATURAL GAS FROM FACTORY




ELECTRICAL REQUIREMENTS: INSTALLATION REQUIRES AN OUTDOOR 120V/15GFI ELECTRICAL OUTLET ADJACENT TO PRODUCT



**COOKING CONFIGURATION:** BUILT-IN GRILL WITH 3 STAINLESS STEEL BURNERS

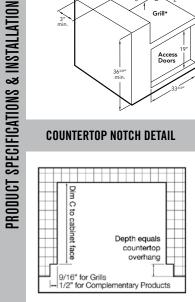



**INSULATING JACKET** 

Note: Insulating jacket required for all grills installed into a combustible enclosure. For natural gas grills, Lynx recommends using ¾° gas lines. Side burners may be rotated 90 degrees. See installation manuals for details.