



Special Notes: LED GU10 lighting. M600 and M1200 blowers are sold separately. Features stainless steel baffle filters.

WIDTH:	46 3/8"				
DEPTH:	19 1/4"				
HEIGHT:	12 1/2"				
CFM:	(Chart A)				
SONES:	N/A				
AMPS:	(Chart B)				
# LIGHTS:	3				



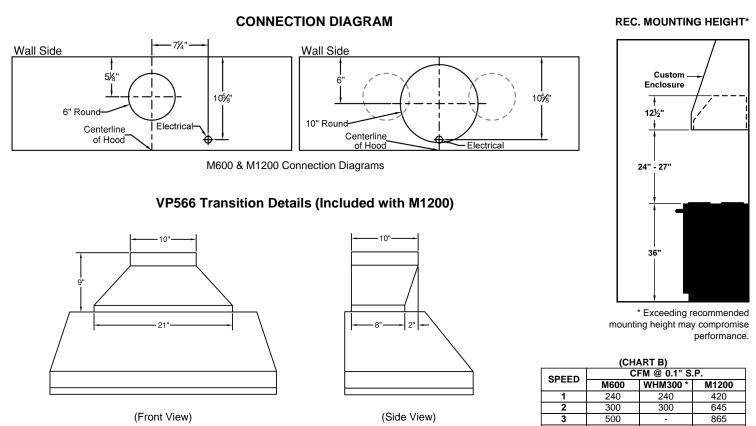

4 625 - 1015 * The WHM300 is a wiring harness that when used with the M600 blower (sold separately) will disable blower speeds exceeding 300 CFM.

used with the M600 blower (sold separately) will disable blower speeds exceeding 300 CFM.										
(CHART A) ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT										
MODEL	VOLTS	AMPS+	нz	CFM SP@0.0"	CFM SP@0.1"	CFM SP@0.25"	CFM SP@0.5"	CFM SP@0.75"	MIN. ROUND DUCT	
			112						SIZE	
M600 Single	115	5.0	60	630	625	615	600	580	6" (28in.^2)	
M600 w/WHM300 Harness	115	5.0	60	302	300	295	288	278	6" (28in.^2)	
M1200 Dual	115	10.0	60	1035	1015	1000	995	915	10" (79in.^2)	

+Add 0.5 amp for each halogen light. Hoods are available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").

