MLRE124

24" REFRIGERATOR

MARVEL CLASSIC COLLECTION



MAIN FEATURES

- 5.1 cu ft. capacity stores up to 115 cans (12-oz)
- · MaxStore bin organizes loose items
- · Half-width shelf allows for tall item storage
- Includes 1 cantilevered black steel-framed glass shelf and 1 fixed steel-framed glass shelf
- Cantilevered shelving system can hold up to 35 lbs and features 11 adjustable heights
- Dynamic cooling technology delivers rapid cool down, frostfree operation, and temperature stability
- Digital controls allow you to select a temperature from 34°F to 60°F
- · Door ajar and high/low temperature alerts
- · Arctic white LED theater-style lighting
- · Elegant midnight black interior
- Panel ready model requires 3/4" or 5/8" custom panel and handle (not supplied by Marvel)

WARRANTY

 1-year parts and labor warranty and 5-year sealed system parts warranty (see complete warranty for details)

FINISH OPTIONS



DOOR STYLE	DOOR SWING	MODEL NUMBER
Solid Stainless Steel	Right Hinge	MLRE124-SS11A
Solid Stainless Steel	Left Hinge	MLRE124-SS21A
Solid Panel Ready	Right Hinge	MLRE124-IS11A
Solid Panel Ready	Left Hinge	MLRE124-IS21A

















DIMENSIONAL DRAWINGS

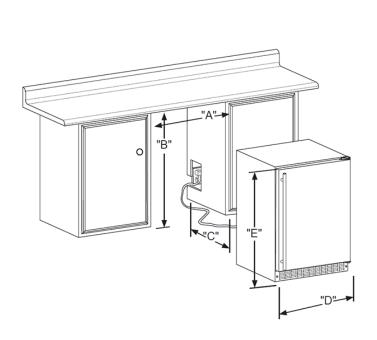

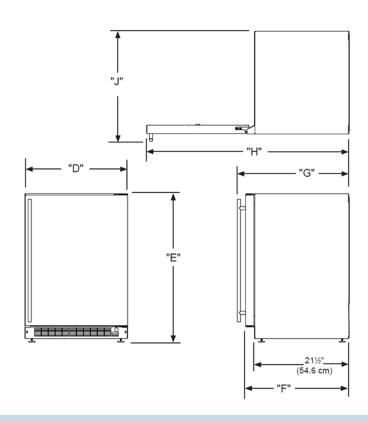

ROUGH	IN	וח	MEN	101	ONS	*
кообп	114	$\boldsymbol{\nu}$		<i>4</i> 3 1	CIV	

"A"	"B"	"C"
24"	34" to 35"	24"
(61 cm)	(86.4 to 88.9 cm)	(61 cm)

CABINET DIMENSIONS*

"D"	"E"	"F"	"G"	"H"	"J"
23-7/8"	33-3/4" to 34-3/4"	23-5/8"*	25-1/2*	46-3/8"*	25-3/4"*
(60.7 cm)	(85.7 cm to 88.3 cm)	(60 cm)	(64.8 cm)	(117.8 cm)	(65.4 cm)

^{*}Stainless steel model dimensions only. For panel-ready models, see the owner's guide online at marvelrefrigeration.com.

PRODUCT SPECIFICATIONS

Capacity 5.1 cu. ft. **Cord Length** 6 ft.

Electrical Requirements 115V / 60 Hz / 15A

ENERGY STAR Yes

Panel Height 29-21/32" (75.3 cm)

Panel Thickness Panel Type 2-3/4" (7 cm) Solid Panel

Panel Width 23-5/8" (60 cm) **Refrigerant Type** R600a

5/8" (1.6 cm) or 3/4" (1.9 cm)

MARVEL

Sabbath Mode Yes **Shipping Dimensions**

28" W x 31" D x 37" H

Shipping Weight 160 lbs **Temperature Range** 34°F to 60°F

For comprehensive installation instructions, including panel overlay details, please visit marvelrefrigeration.com to access the owner's guide. All specifications are subject to change without notice.