

# NSE90H63S

# SAMSUNG

Bespoke Smart Slide-In Electric Range 6.3 cu. ft.  
with Illuminated Precision Knobs



## Available Colors



**Stainless Steel**  
NSE90H63SR



**White Glass**  
NSE90H63SW

## Features

- Illuminated Precision Knobs
- Soft-Close Door
- No-Preheat Air Fry Max (Tray Included)
- True Convection
- Air Sous Vide
- Temperature Probe
- Fingerprint Resistant Finish (Excluding White Glass)
- Self & Steam Clean
- Storage Drawer

## Convenience

- Wi-Fi Connectivity
- Voice Enabled
- Convection Auto Conversion
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Timer
- Sabbath Mode

## Specifications

### Electric Ceramic Cooktop

- Right Front: 6"/9"/12" 3,000W
- Left Front: 6"/9" 3,600W Express Boil
- Right Rear: 6" 1,200W
- Left Rear: 6" 1,200W
- Center: 6" Warming Zone (100W)

### Oven

- Capacity: 6.3 cu. ft.
- Convection Element/Heater
- Convection Bake
- Convection Roast
- Bake
- Variable Broil: Low/High
- Air Fry Max
- Air Sous Vide
- Keep Warm
- Bread Proof
- Pizza (From SmartThings App\*)

\*Available on Android and iOS devices. A Wi-Fi connection and a Samsung account are required.

## Dimensions

### Oven Interior Dimensions (WxHxD)

Dimensions: 24<sup>13</sup>/<sub>16</sub>" x 22<sup>7</sup>/<sub>16</sub>" x 19<sup>3</sup>/<sub>4</sub>"

### Product Dimensions with handle (WxHxD)

Dimensions: 29<sup>15</sup>/<sub>16</sub>" x 36" – 36<sup>3</sup>/<sub>4</sub>" (Adj.) x 28<sup>3</sup>/<sub>8</sub>"  
Weight: 170.2 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 33<sup>1</sup>/<sub>16</sub>" x 41<sup>1</sup>/<sub>8</sub>" x 30<sup>5</sup>/<sub>16</sub>"  
Weight: 189.8 lbs

## Warranty

One (1) Year Parts and Labor

## UPC

Finish	Model #	UPC Code
Stainless Steel	NSE90H63SR	198957265235
White Glass	NSE90H63SW	198957265242

## Rating





ENERGY STAR® Rated:  
195 kWh/yr

# NSE90H63S

# SAMSUNG

Bespoke Smart Slide-In Electric Range 6.3 cu. ft.  
with Illuminated Precision Knobs

## Installation Specifications

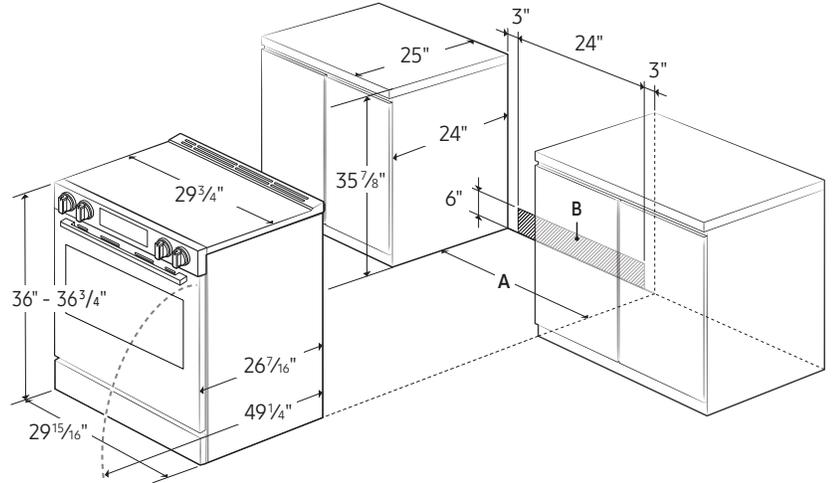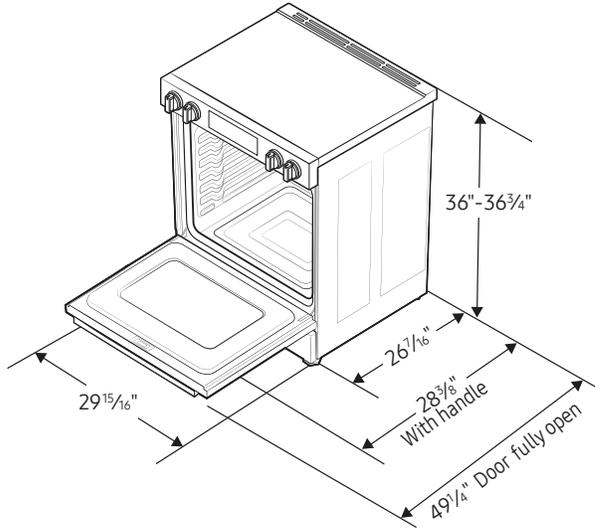


**A:** Cabinet opening minimum 30"  
**B:** Acceptable electrical outlet area

**IMPORTANT:** If your cabinets are over 36<sup>3</sup>/<sub>4</sub>" high, you must install this range on a hard, heat-resistant support that raises the surface of the range so that it is about even with the countertop.

## Electrical Requirements

240V/208V/60 Hz  
40 Amps

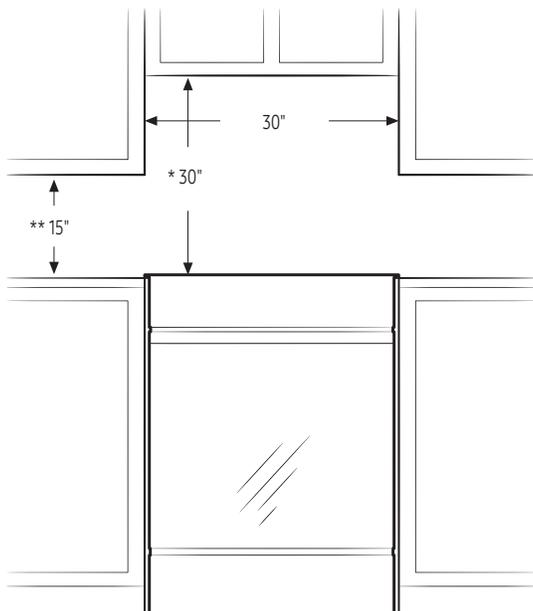

\* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

\*\*15" minimum between the countertop and the adjacent cabinet bottom.

**IMPORTANT:** Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip bracket that is included.

