

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## CONVECTION SPEED OVEN, 24"



### OVERVIEW

The perfect addition to the kitchen, this Convection Speed Oven provides a variety of fast cooking options including True Convection and Broil.

### MODELS

Convection Speed Oven, 24", Black with stainless steel  
OM24NDB1

Trim Kit, 30", Black with stainless steel  
TK30NDB1

### SERIES & STYLE

Series 9  
Contemporary Style

### MODELS

Convection Speed Oven, 24", Black  
OM24NDBB1

Trim Kit, 30", Black  
TK30NDBB1

### SERIES & STYLE

Series 9  
Minimal Style

### FEATURES

- ① Choice of stainless steel or elegant black trim
- ② Install in multiple configurations to suit your kitchen design
- ③ Optional 30" trim kit allows seamless vertical configuration when paired with a Fisher & Paykel 30" Oven
- ④ Intuitive touch display with capacitive touch controls
- ⑤ Six cooking modes and size microwave levels. 900W microwave power, 1500W fan element power.
- ⑥ CoolTouch door protecting your hands and the surrounding cabinetry
- ⑦ Easy to clean stainless steel interior
- ⑧ 1.3 cu ft total capacity
- ⑨ Full width broil function with 1500W power
- ⑩ Automatic cooking allows you to program in desired cooking mode and duration

### ACCESSORIES

- ① Optional 30" trim kit
- ② Baking pan and wire shelf
- ③ Turntable wire stand
- ④ Glass turntable

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## CONVECTION SPEED OVEN, 24"


### SPECIFICATIONS

|                       |  |
|-----------------------|--|
| <b>Model No.</b>      | OM24NDB1 (Optional 30" Trim Kit TK30NDB1)<br>OM24NDBB1 (Optional 30" Trim Kit TK30NDBB1) |
| <b>Dimensions</b>     | H 18 1/16" (458mm) x W 23 1/2" (596mm) x<br>D 22 1/8" (562mm)                            |
| <b>Total capacity</b> | 1.3 cu ft (37L)  |
| <b>Weight</b>         | 38kg (84lb)  |
| <b>Electrical</b>     |  |
| <b>Supply</b>         | 120V / 208V - 120V / 240V 60Hz   |
| <b>Service</b>        | 15 Amp circuit   |
| <b>Receptacle</b>     | Hard wired   |

### PRODUCT DIMENSIONS

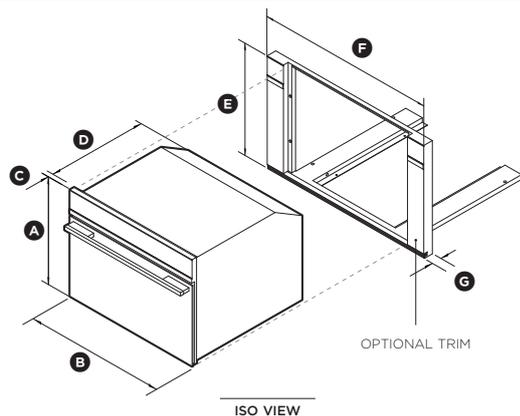

### CAVITY DIMENSIONS: STANDARD INSTALLATION

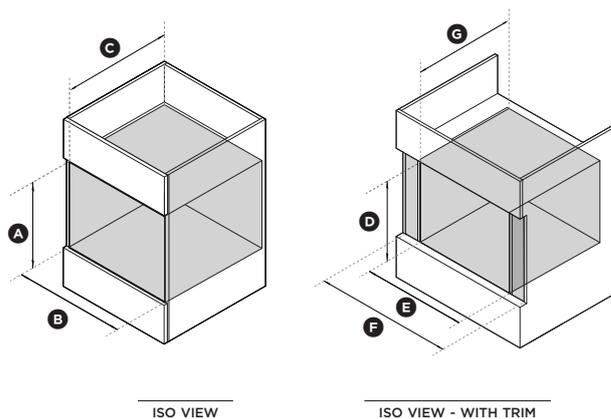

|     |   | in       | mm  |
|-----|---|----------|-----|
| (A) | Overall height of speed oven                | 18 1/6   | 458 |
| (B) | Overall width of speed oven                 | 23 1/2   | 596 |
| (C) | Depth of speed oven front and control panel | 7/8      | 22  |
| (D) | Depth of speed oven chassis                 | 21 1/4   | 540 |
| (E) | Height of optional trim                     | 18 13/16 | 478 |
| (F) | Width of optional trim                      | 29 13/16 | 757 |
| (G) | Depth of optional trim front                | 1 5/8    | 42  |

|     |  | in       | mm  |
|-----|--|----------|-----|
| (A) | Height of cavity   | 17 3/4   | 450 |
| (B) | Minimum inside width of cavity                           | 22 1/6   | 560 |
| (C) | Minimum inside depth of cavity                           | 22 1/6   | 560 |
| (D) | Height of cavity with trim                               | 28 15/16 | 480 |
| (E) | Minimum inside width of cavity with trim                 | 30       | 761 |
| (F) | Width needed to include trim within cabinetry            | 22 1/6   | 560 |
| (G) | Minimum inside depth of cavity with trim - proud install | 22 1/6   | 560 |
|     | Minimum inside depth of cavity with trim - flush install | 23 5/6   | 600 |

Note: Ventilation required at the rear of the cavity.