PROF365IRTXT

36" 5 INDUCTION ZONES RANGETOP STAINLESS STEEL





Bring Italian design and precision into your kitchen with the Bertazzoni signature counter-depth rangetop, designed to install flush with surrounding countertops and cabinets.

Cook like a pro on the 5 induction zomes, spaciously laid out to accommodate pots of different sizes,

Crank up the heat using the powerful induction booster function that delivers 3700 Watts of power.

Conveniently bridge the 2 right-side areas to accommodate extra large cookware and griddles.

Clean the ceran surface in no time after cooking.

Designed and manufactured with pride in Italy.

Industry leading 2 years parts and labor warranty.

PRODUCT FEATURES	
Maintop	5 induction zones

Front Left 6" 1400W (2200 W booster)
Back Left 9" 2300W (3700 W booster)
Center 9" 2300W (3700 W booster)
Front Right 9" 2100W (3700 W booster)
Back Right 9" 2100W (3700 W booster)

Controls	Metal Knobs
Bridge function	Yes
Residual heat indicator	Yes
TECHNICAL SPECIFICATIONS	
Electrical supply	208 V , 60 Hz - 10000 W 240 V 60 HZ - 11500 W 50 Amp dedicated circuit
Power connection	Hardwired with 59" power cord
Certification	cULus
Packaging dimensions and weight	W 40" H 12 3/8" D 30 1/8" 75.0 lbs


version: 1 bertazzoni.com

PROF365IRTXT


36" 5 INDUCTION ZONES RANGETOP STAINLESS STEEL



PRODUCT DIMENSIONS





FRONT VIEW



SIDE VIEW

ELECTRICAL CONNECTION





outlet should be installed


according to this drawing.


INSTALLATION REQUIREMENTS

Combustible material cannot be installed within shaded area.

For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer's installation requirements.

CUTOUT DIMENSIONS



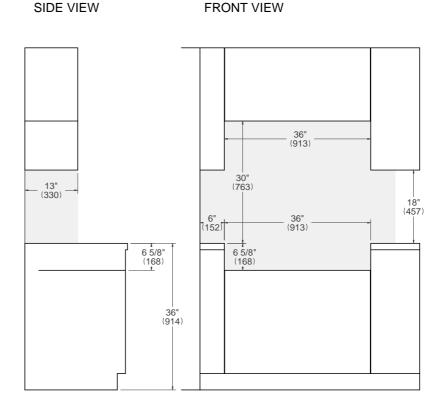

For installation of multiple products in combination, refer to the Design Guide at us.bertazzoni.com or ca.bertazzoni.com