

PUR 98 D Island décor hood with energy-efficient LED lighting and backlit controls for easy use.




- Timeless design stainless steel canopy 35 3/8 (898) in (mm) wide
- Powerful ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean Miele CleanCover
- Suitable for every home vented or recirculating

EAN: 4002515940082 / Material number: 10743130 / Old Material Number: 28410857USA

Design	
Island ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
	DKF 12-P
OdorFree charcoal filter (order separately)	DRF 12-F
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	_ 3
Booster levels	1
Programmable Intensive switch-off	
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	3
Lighting	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	500 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	430
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Overall min. height for vented and external in in. (mm)	27 1/4 (690)
Canopy width in in.(mm)	35 3/8 (898)
Overall max. height for vented and external in in. (mm)	39 (990)
	
Canopy height in in.(mm)	2 7/8 (70)
Overall min. height for recirculation in in. (mm)	29 5/8 (750)
Canopy depth in in.(mm)	23 5/8 (598)
Overall max. height for recirculation in in. (mm)	41 3/4 (1060)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	75 (34.0)
Hard-wired	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
	1
Number of phases	
Number of phases Frequency in Hz	60
· · · · · · · · · · · · · · · · · · ·	60
Frequency in Hz	60




PUR 98 D Island décor hood with energy-efficient LED lighting and backlit controls for easy use.

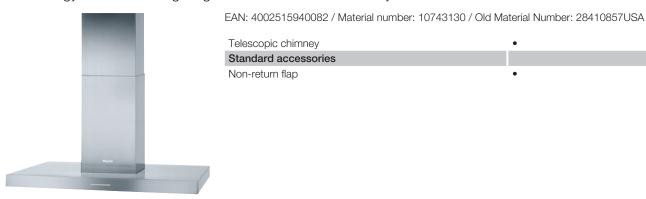



PUR 98 D Island décor hood with energy-efficient LED lighting and backlit controls for easy use.



PUR 98 D (Installation drawing) - USA/CDN

1) Installation area/site, 2) Vented, 3) Recirculation, 4) Installation alternatively with spacer frame, 5) Ventilation grille positioned at the top for recirculation, 6) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.