

# SCRR232LH



## **Product Features:**

#### Commercially approved Commercial construction meeting UL commercial listing standards Complete stainless steel construction Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup Forced air cooling Top-mounted commercial fan ensures rapid temperature recovery Automatic defrost with adjustable cycle Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup defrost Closes to save energy but will remain open when the door is opened at a 90° angle for easier Self-closing door loading Open door alarm Alarm will beep 3 times if the door is left open for 30 seconds, 5 times at 60 seconds, and will sound continuously if the door is open for more than 5 minutes Temperature alarm Visual and audible alarms alert if the interior temperature rises or falls out of set range Commercial grade casters Ships with a set of casters (2 locking) for easy mobility as needed Digital controls with a large LED readout in Celsius or Fahrenheit for intuitive temperature Microprocessor control panel management

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

#### 83.75" x 27.5" x 31" (H x W x D)

23 cu.ft. commercial reach-in refrigerator in complete stainless steel with left hand door swing

### **Highlights:**

Commercially listed to NSF standards

Stainless steel interior and exterior cabinet for true durability in high traffic commercial settings


Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading






# SCRR232LH Specifications:

Overview	
Height of Cabinet	83.75" (213 cm)
Width	27.5" (70 cm)
Depth	31.0" (79 cm)
Depth with door at 90°	56.5" (144 cm)
Capacity	23.0 cu.ft. (651 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Stainless Steel
US Electrical Safety	UL
Canadian Electrical Safety	ULC
Sanitation	ETL-S
Amps	7.5
Voltage/Frequency	115 V AC/60 Hz
Weight	282.0 lbs. (128 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101066783
Refrigerator Features	
Refrigerator Features Door Swing	LHD
	LHD
Door Swing	
Door Swing Reversible	No
Door Swing Reversible Shelf Type	No Wire
Door Swing Reversible Shelf Type Shelf Qty	No Wire 4
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves	No Wire 4 Yes
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type	No Wire 4 Yes Digital
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type	No Wire 4 Yes Digital Interior
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type	No Wire 4 Yes Digital Interior R290
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount	No Wire 4 Yes Digital Interior R290 2.5oz.
Door SwingReversibleShelf TypeShelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSI	No Wire 4 Yes Digital Interior R290 2.5oz. 290.0
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI	No           Wire           4           Yes           Digital           Interior           R290           2.5oz.           290.0           155.0
Door SwingReversibleShelf TypeShelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSIWheel Qty	No           Wire           4           Yes           Digital           Interior           R290           2.5oz.           290.0           155.0           4
Door Swing Reversible Shelf Type Shelf Qty Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Wheel Qty Interior Light	No           Wire           4           Yes           Digital           Interior           R290           2.5oz.           290.0           155.0           4           Yes
Door SwingReversibleShelf TypeShelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSIWheel QtyInterior LightTemperature Range	No           Wire           4           Yes           Digital           Interior           R290           2.5oz.           290.0           155.0           4           Yes
Door SwingReversibleShelf TypeShelf QtyAdjustable ShelvesThermostat TypeFan TypeRefrigerant TypeRefrigerant AmountHigh Side PSILow Side PSIWheel QtyInterior LightTemperature RangeDimensions	No           Wire           4           Yes           Digital           Interior           R290           2.5oz.           290.0           155.0           Yes           33 to 41°F

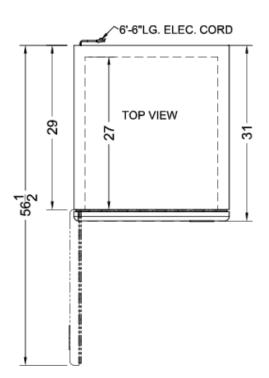





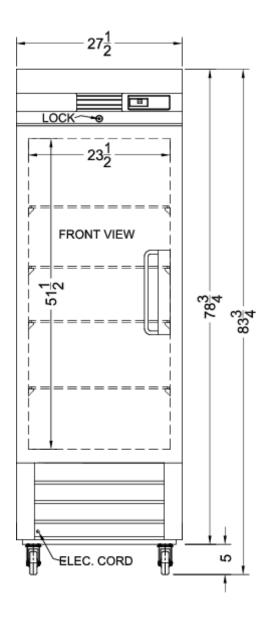

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

