
FRIGIDAIRE

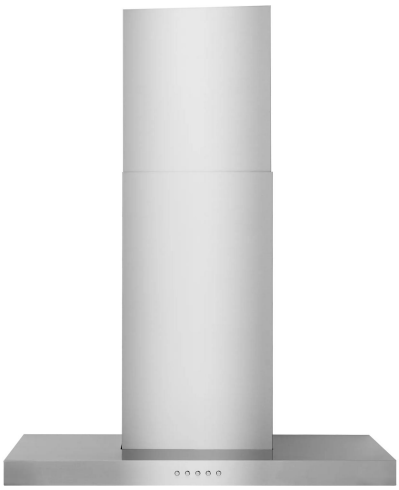

Wall Mount

Available Products: UCVH3060AS

Available Colors: Stainless Steel

Version: 11/26

Product Specifications

Ventilation System

Ventilation Options	Convertible
Ducted Vent	Yes - Out of the Box
Ductless Vent	Optional (See Manual)
Exhaust Fan Speeds	3
Maximum Air Flow Capacity	340 CFM
Minimum Air Flow Capacity	240 CFM
Maximum Sones Rating	5 sone
Minimum Sones Rating	3 sone
Grease Filter Included	Yes
Grease Filter Quantity	2
Grease Filter Type	Aluminum Mesh
Grease Filter Dishwasher Safe	Yes
Charcoal Filter Included	Yes
Charcoal Filter Quantity	2

Surface Light System

Lighting Type	LED
Number of Lights	2
Number of Light Settings	1

Electrical Specifications

Amps @ 120 Volts	1.7 Amps
Voltage Rating	120 V
Watts @ 120 Volts	202 Watts

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Controls

Control Type	Push Button

Dimensions and Volume

Height	2"
Height With Flue Extension	25"
Width of Flue Extension	12"
Width	29 13/16"
Depth	17 7/8"

Installation

Duct Exit Location	Top
Hardwired	Yes
Power Supply Connection Type	Hard Wired

Certifications and Approvals

HVI Listed	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Available Products: UCVH3060AS | Available Colors: Stainless Steel

Version: 11/26


Installation Diagram

UCVH3060AS/UCVH3060BS


Dimensions	Volts	Hertz	Fan CFM	Speeds	Light Wattage	Stainless Steel Grade
29-13/16 Inches W	120	60	340	High	4	430
17-7/8 Inches D				Medium		
24-13/32 - 46-21/32 Inches H				Low		

UCVH3660AS/UCVH3660BS

Dimensions	Volts	Hertz	Fan CFM	Speeds	Light Wattage	Stainless Steel Grade
35 - 7/32 Inches W	120	60	340	High	4	430
17-7/8 Inches D				Medium		
24-13/32 - 46-21/32 Inches H				Low		

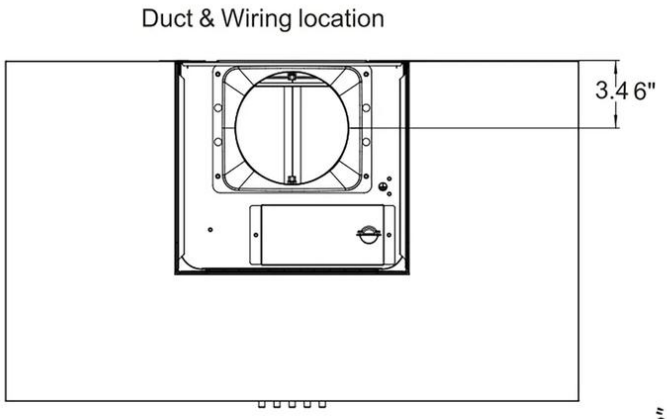

Wiring should enter the back wall at least 20" above the bottom of the hood at height install and be contained within the flue covers.
It is best if the wiring is located offset to the right of center to avoid interference with ducting

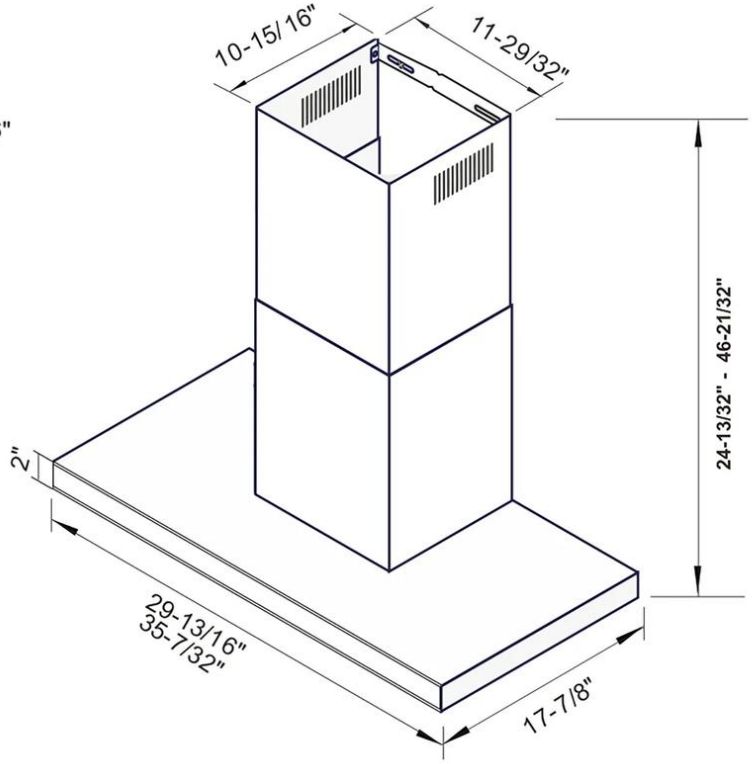

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca