



24" SIGNATURE SERIES
Dual-Zone Wine Reserve



eco friendly
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Glass Door Model



Solid Door Model

MODELS	DESCRIPTION
HP24DS-4-1R/L	Indoor Signature Series Dual Zone Wine Reserve Solid Stainless Steel Door
HP24DS-4-2R/L	Indoor Signature Series Dual Zone Wine Reserve Solid Panel Ready Door
HP24DS-4-3R/L	Indoor Signature Series Dual Zone Wine Reserve Stainless Steel Glass Door
HP24DS-4-4R/L	Indoor Signature Series Dual Zone Wine Reserve Panel Ready Glass Door
HP24DO-4-1R/L	Outdoor Signature Series Dual Zone Wine Reserve Solid Stainless Steel Door
HP24DO-4-2R/L	Outdoor Signature Series Dual Zone Wine Reserve Solid Panel Ready Door
HP24DO-4-3R/L	Outdoor Signature Series Dual Zone Wine Reserve Stainless Steel Glass Door
HP24DO-4-4R/L	Outdoor Signature Series Dual Zone Wine Reserve Panel Ready Glass Door
HP24DM-4-1R/L	Marine Signature Series Dual Zone Wine Reserve Solid Stainless Steel Door
HP24DM-4-2R/L	Marine Signature Series Dual Zone Wine Reserve Solid Panel Ready Door
HP24DM-4-3R/L	Marine Signature Series Dual Zone Wine Reserve Stainless Steel Glass Door
HP24DM-4-4R/L	Marine Signature Series Dual Zone Wine Reserve Panel Ready Glass Door

KEY PRODUCT FEATURES AND BENEFITS

- Patented dual zone technology allows you to store your red and white wines in separate temperature zones for precise storage conditions
- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Wine shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

Quick Features:

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 32 bottles of wine



24" SIGNATURE SERIES
Dual-Zone Wine Reserve

MODEL NUMBERS		HP24DS	HP24DO	HP24DM
MODEL DESCRIPTION		24" Indoor Dual Zone Wine Reserve	24" Outdoor Dual Zone Wine Reserve	24" Marine/Coastal Dual Zone Wine Reserve
ATTRIBUTES				
Perlick Anti-Condensation System		NO	YES	YES
Perlick Armor™		NO	NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
STANDARD OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		222 lbs (100.7 kg.)	222 lbs (100.7 kg.)	222 lbs (100.7 kg.)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.0 amps	2.0 amps	2.0 amps
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'	6'
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital	Digital	Digital
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (50g)	R600a (50g)	R600a (50g)
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube
	Temperature Settings F°(C°)	45°/ 51° (7.2°/ 10.5°) & 55°/ 65° (12.7°/ 18.3°) Factory Set Point 45° (7.2°) & 55° (12.7°)	45°/ 51° (7.2°/ 10.5°) & 55°/ 65° (12.7°/ 18.3°) Factory Set Point 45° (7.2°) & 55° (12.7°)	45°/ 51° (7.2°/ 10.5°) & 55°/ 65° (12.7°/ 18.3°) Factory Set Point 45° (7.2°) & 55° (12.7°)
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr	450 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes	Yes
	PLUMBING	None Required	None Required	None Required

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
RS-24-24D	Divider Shelf for HP24/HC24/HA24 models

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.

! WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about **Prop 65**, go to P65Warnings.ca.gov.




24" SIGNATURE SERIES
Dual-Zone Wine Reserve

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP24DS-4-1L	HP24DS4J-00-SLF0F	Left	No
	HP24DS-4-1R	HP24DS4J-00-SRF0F	Right	No
	HP24DS-4-2L	HP24DS4J-00-PL00F	Left	No
	HP24DS-4-2R	HP24DS4J-00-PR00F	Right	No
	HP24DS-4-3L	HP24DS4J-00-TLF0F	Left	No
	HP24DS-4-3R	HP24DS4J-00-TRF0F	Right	No
	HP24DS-4-4L	HP24DS4J-00-RL00F	Left	No
	HP24DS-4-4R	HP24DS4J-00-RR00F	Right	No
	HP24DS-4-1LL	HP24DS4J-00-SLFLF	Left	Yes
	HP24DS-4-1RL	HP24DS4J-00-SRFLF	Right	Yes
	HP24DS-4-2LL	HP24DS4J-00-PL0LF	Left	Yes
	HP24DS-4-2RL	HP24DS4J-00-PR0LF	Right	Yes
	HP24DS-4-3LL	HP24DS4J-00-TLFLF	Left	Yes
	HP24DS-4-3RL	HP24DS4J-00-TRFLF	Right	Yes
	HP24DS-4-4LL	HP24DS4J-00-RL0LF	Left	Yes
	HP24DS-4-4RL	HP24DS4J-00-RR0LF	Right	Yes
OUTDOOR	HP24DO-4-1L	HP24DO4J-00-SLF0F	Left	No
	HP24DO-4-1R	HP24DO4J-00-SRF0F	Right	No
	HP24DO-4-2L	HP24DO4J-00-PL00F	Left	No
	HP24DO-4-2R	HP24DO4J-00-PR00F	Right	No
	HP24DO-4-3L	HP24DO4J-00-TLF0F	Left	No
	HP24DO-4-3R	HP24DO4J-00-TRF0F	Right	No
	HP24DO-4-4L	HP24DO4J-00-RL00F	Left	No
	HP24DO-4-4R	HP24DO4J-00-RR00F	Right	No
	HP24DO-4-1LL	HP24DO4J-00-SLFLF	Left	Yes
	HP24DO-4-1RL	HP24DO4J-00-SRFLF	Right	Yes
	HP24DO-4-2LL	HP24DO4J-00-PL0LF	Left	Yes
	HP24DO-4-2RL	HP24DO4J-00-PR0LF	Right	Yes
	HP24DO-4-3LL	HP24DO4J-00-TLFLF	Left	Yes
	HP24DO-4-3RL	HP24DO4J-00-TRFLF	Right	Yes
	HP24DO-4-4LL	HP24DO4J-00-RL0LF	Left	Yes
	HP24DO-4-4RL	HP24DO4J-00-RR0LF	Right	Yes
MARINE & COASTAL	HP24DM-4-1L	HP24DM4J-00-MLF0F	Left	No
	HP24DM-4-1R	HP24DM4J-00-MRF0F	Right	No
	HP24DM-4-2L	HP24DM4J-00-PL00F	Left	No
	HP24DM-4-2R	HP24DM4J-00-PR00F	Right	No
	HP24DM-4-3L	HP24DM4J-00-NLF0F	Left	No
	HP24DM-4-3R	HP24DM4J-00-NRF0F	Right	No
	HP24DM-4-4L	HP24DM4J-00-RL00F	Left	No
	HP24DM-4-4R	HP24DM4J-00-RR00F	Right	No
	HP24DM-4-1LL	HP24DM4J-00-MLFLF	Left	Yes
	HP24DM-4-1RL	HP24DM4J-00-MRFLF	Right	Yes
	HP24DM-4-2LL	HP24DM4J-00-PL0LF	Left	Yes
	HP24DM-4-2RL	HP24DM4J-00-PR0LF	Right	Yes
	HP24DM-4-3LL	HP24DM4J-00-NLFLF	Left	Yes
	HP24DM-4-3RL	HP24DM4J-00-NRFLF	Right	Yes
	HP24DM-4-4LL	HP24DM4J-00-RL0LF	Left	Yes
	HP24DM-4-4RL	HP24DM4J-00-RR0LF	Right	Yes



24" SIGNATURE SERIES
Dual-Zone Wine Reserve

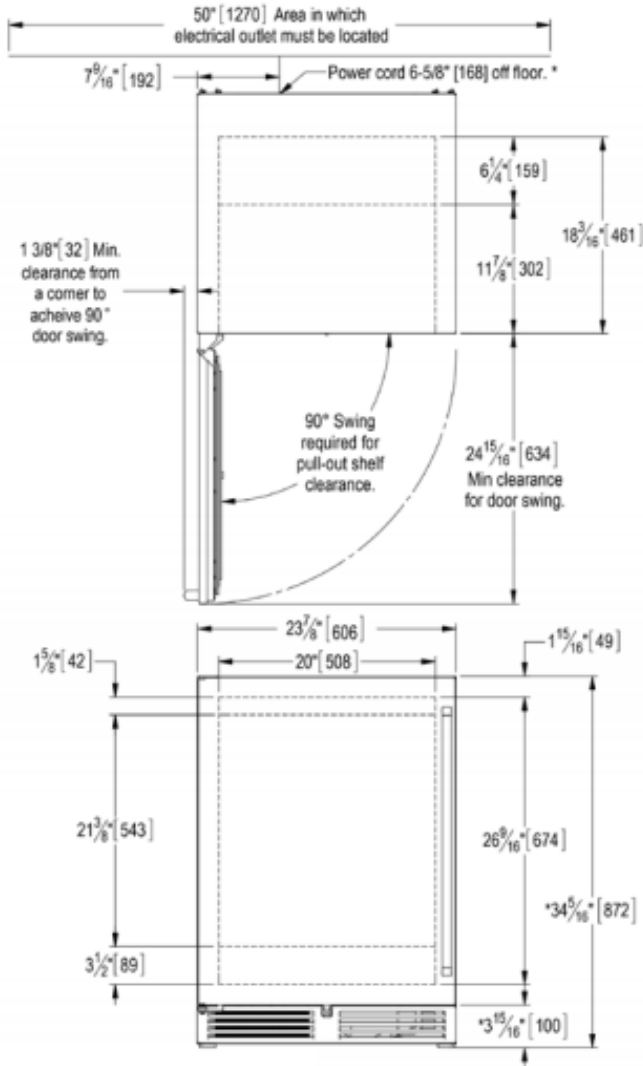

* - Leg levelers can add 3/4" [19] to these dimensions when fully extended.

